




# Masterlift 2.35 Combi Check-in PD 1550 MB

Electro-hydraulic twin-ram lift, 3.5 t with platforms and wheel-free device

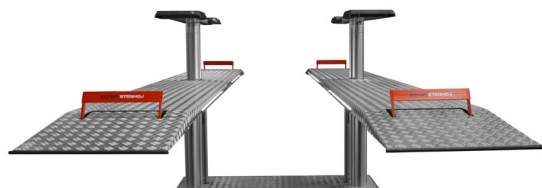

Order no. 16064

Item no.	Piece/set	Part of the approval according to order no.16064:
21500	1	Superstructure 2.35 F 440 Combi Check-in, on floor
21504	1	Repair platform superstructure 2.35 Pv 160-220 xy
10290	1	Hydraulic unit ML 2.35 Combi Check in PD 1550, stroke 1900 mm
12036	1	Ecological hydraulic fluid 17 ltr.
12466	1	Mercedes approval and painting, type Fn/Combi, grey RAL 7015
12407	1	Extra charge zinc coated and painted platforms
11109	1	16A circuit breaker in the control box
21080	1	Power distribution for one platform
21097	1	Pneumatic installation for 1 side of the platform
11102	1	Rubber blocks 40 mm, 1 set = 4 pcs.
11103	1	Document holder AUTOPSTENHOJ
11104	1	Magnetic tool tray set, 1 set = 2 pcs.
		<b>Not part of the approval (options)</b>
11071	1	Set of cables 10 m
12117	1	Cassette PD 1550, ML Combi Check in

The Masterlift 2.35 Combi Check-in PD is optimally suited for **quick and easy vehicle lifting**.

The platform is constructed of very strong and rigid **solid steel** that offers a **high degree of stability**. They are zinc coated and painted. Looks great and works great! Various lengths of repair platforms, which come with **xy-function in the premium version as standard**, make the Masterlift 2.35 NxT the perfect helper in your workshop.

Four **strong 123 mm diameter cylinders** are also designed for long-lasting functionality and further round off the high-quality level, which ensures **low maintenance requirements**.

Even in the event of a power blackout, the lift can still be lowered without any problems thanks to the pneumatic emergency lowering system.

The Masterlift Combi Check-in KA 1550 is perfectly completed by a **control system that is both visually and technically convincing**.

## Standard colour:

Platforms: RAL 7016 and aluminium coated and integrated LED lighting

Pv Premium: zinc coated and painted RAL 9006

## Options:

XY-pads

Sets of rubber blocks, 40, 60, 80 and 100 mm

## Installation:

Superstructure on floor

Superstructure in floor

## Steel cassette:

Hot galvanized

Coated

