

Mascot 2-post lifts

with 4.0 and 5.5 t lifting capacity
Electro-hydraulic: Mascot 40 H II, 40 HB, 55 H
Electro-mechanical: Mascot 40 M II

**VERTICAL
POWER**

Surface-mounted lifts

When it comes to a high level, you should be sure to pay attention to the details.

Mascot series:

The 2-post lifts from the Mascot series are convincing as multifunctional workstations with a very good lifting area and a low minimum height, in accordance with the specifications of leading car manufacturers.

Mascot H - hydraulic

The Mascot lifts are equipped as standard with a valve that can reduce the lowering speed. This is particularly useful when removing high-voltage batteries and a slow and controlled lowering of the vehicle is needed.

Mascot lifts can be switched from the standard setting – a short lift before lowering – to immediate lowering using a switch on the control unit.

For optimum workplace efficiency, the Mascot series has a second control unit on the counter-column, incl. compressed air and power supply.

The Mascot lifts all have a reliable hydraulic system and guarantee long service life with low running costs.

Mascot M - electro-mechanical

The Mascot electromechanical lift is characterised by the use of our cold-rolled spindle. The design is based on our proven hydraulic models – this is how we use existing synergies, reduce the amount of material used and create a sustainable, marketable product with maximum added value.

Simple. Strong. Future-proof.

The highlights of the Mascot series:

- Low minimum height
- Stable, bent posts
- Powerful drive-concepts
- Universal lifting area
- Premium features in the standard version

Multifunctional workstation with very good lifting area!



Mascot 40 M II



Elektro-mechanical 2-post lift with 4.0 t capacity

Standard colour:

- Arms: RAL 3020
- Posts: RAL 7016

Optional extras:

- Available with different portal heights
- LED-lighting
- Set of expansion bolts
- Base plate extension for poor ground conditions
- Large program of extra pads, depending on type of vehicle

Standard:

- Asymmetrical positioning of the posts
- 360° arm locking system
- Suitable for wheel-support devices

Technical data

	Mascot 40 M II
Lifting capacity	4000 kg
Lifting height	1900 mm
Working height	1995 - 2074 mm
Lifting / lowering time	~ 40 sec.
Motor	2x2.8 kW
Voltage	3x230/400V - 50Hz - 16A

Adjustment range of lifting pads	F: 95-174 mm
Min. height	95 mm
Drive-through width	2407 mm
Width between posts	2753 mm
Total width outer edge base plates	3500 mm
Total height post	2980 mm
Arm length front, min-max.	F DT: 605-1255 mm
Arm length rear, min-max.	F DT: 740-1455 mm

Mascot 40 M II



Electro-mechanical 2-post lift with 4.0 t capacity



Mascot 40 M II

Mascot 40H II, 40HB, 55H



Electro-hydraulic 2-post lift with 4.0 & 5.5 t capacity

Standard colour:

- Arms: RAL 3020
- Posts: RAL 7016

Optional extras:

- Available with different portal heights
- LED lighting
- Set of expansion bolts
- Base plate extension for poor ground conditions
- Large program of extra pads, depending on type of vehicle

Standard:

- Control unit on both columns
- Control units with integrated compressed air and electrical connection
- Switch for slow lowering
- Switch for direct lowering, without lifting from the latch

Technical Data

	Mascot 40 H II	Mascot 40 HB	Mascot 55 H
Lifting capacity	4000 kg	4000 kg	5500 kg
Lifting height	1870 mm	1900 mm	1900 mm
Working height	1965 - 2044 mm	1995 - 2071 mm	2000 - 2047 mm
Lifting / lowering time	~ 40 sec.	~ 40 sec.	~ 50 sec.
Motor	3 kW	3 kW	3 kW
Voltage	3x230 / 400 V-50 / 60Hz – 16 A	3x230 / 400 V-50 / 60Hz – 16 A	3x230 / 400 V-50 / 60Hz – 16 A

Adjustment range of lifting pads	F: 95 - 174 mm	F: 95 - 171 mm	F: 100 - 147 mm
Min. height	95 mm	95 mm	100 mm
Drive-through width	2404 mm	2512 mm	2784 mm
Width between posts	2753 mm	2780 mm	3317 mm
Total width outer edge base plates	3500 mm	3500 mm	3832 mm
Total height post	3995 + 225 mm	2841 3430 mm	4015 mm
Arm length front, min-max.	F DT: 605 - 1255 mm	F DT: 600 - 1250 mm	F DT: 915 - 1850 mm
Arm length rear, min-max.	F DT: 740 - 1455 mm	F DT: 600 - 1250 mm	F DT: 915 - 1850 mm

Mascot 40H II, 40HB, 55H



Electro-hydraulic 2-post lift with 4.0 & 5.5 t capacity



Mascot 40 H II




Mascot 55 H

Mascot 40 HB

Mascot 40 H II

AUTOP UPLIFTING COMPANY STENHOJ

Electro-hydraulic 2-post-lift with 4 t capacity

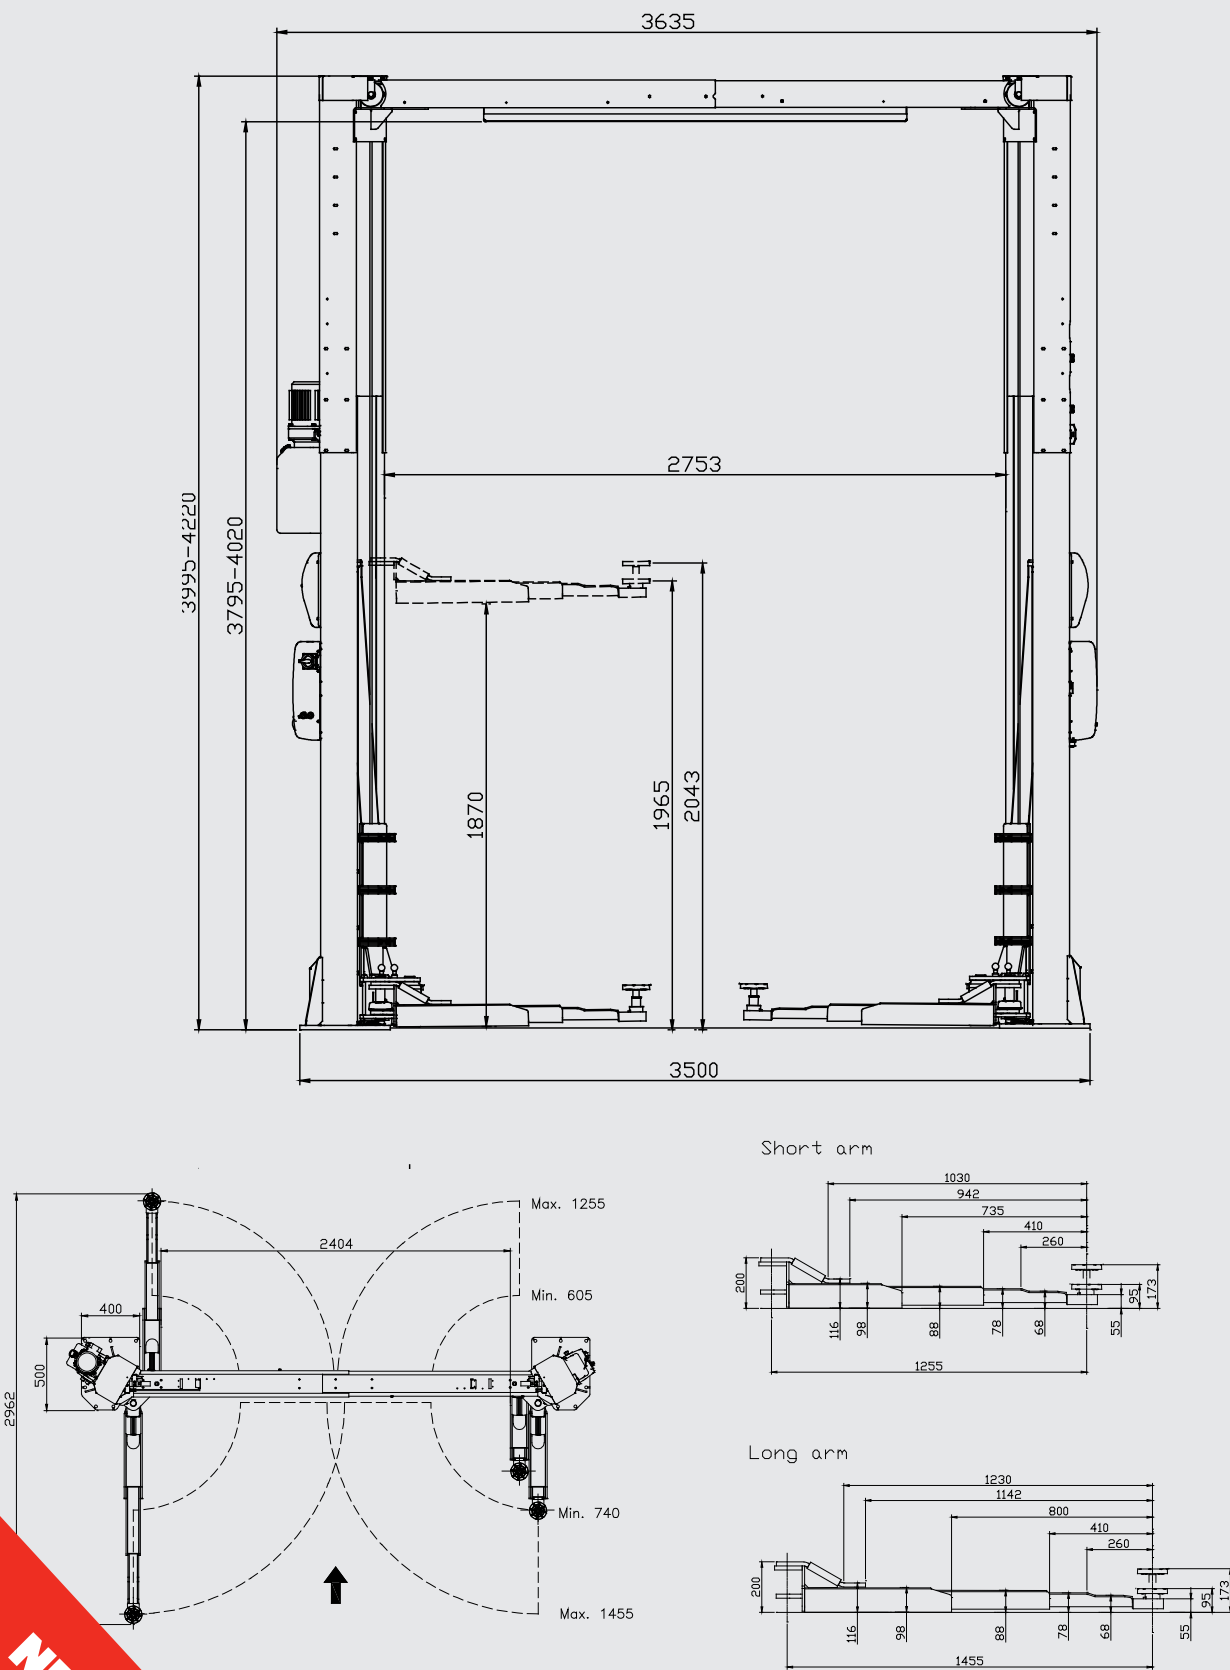


Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 09/2026.

Mascot 40 HB

AUTOP UPLIFTING COMPANY STENHOJ




Electro-hydraulic 2-post lift with 4 t capacity

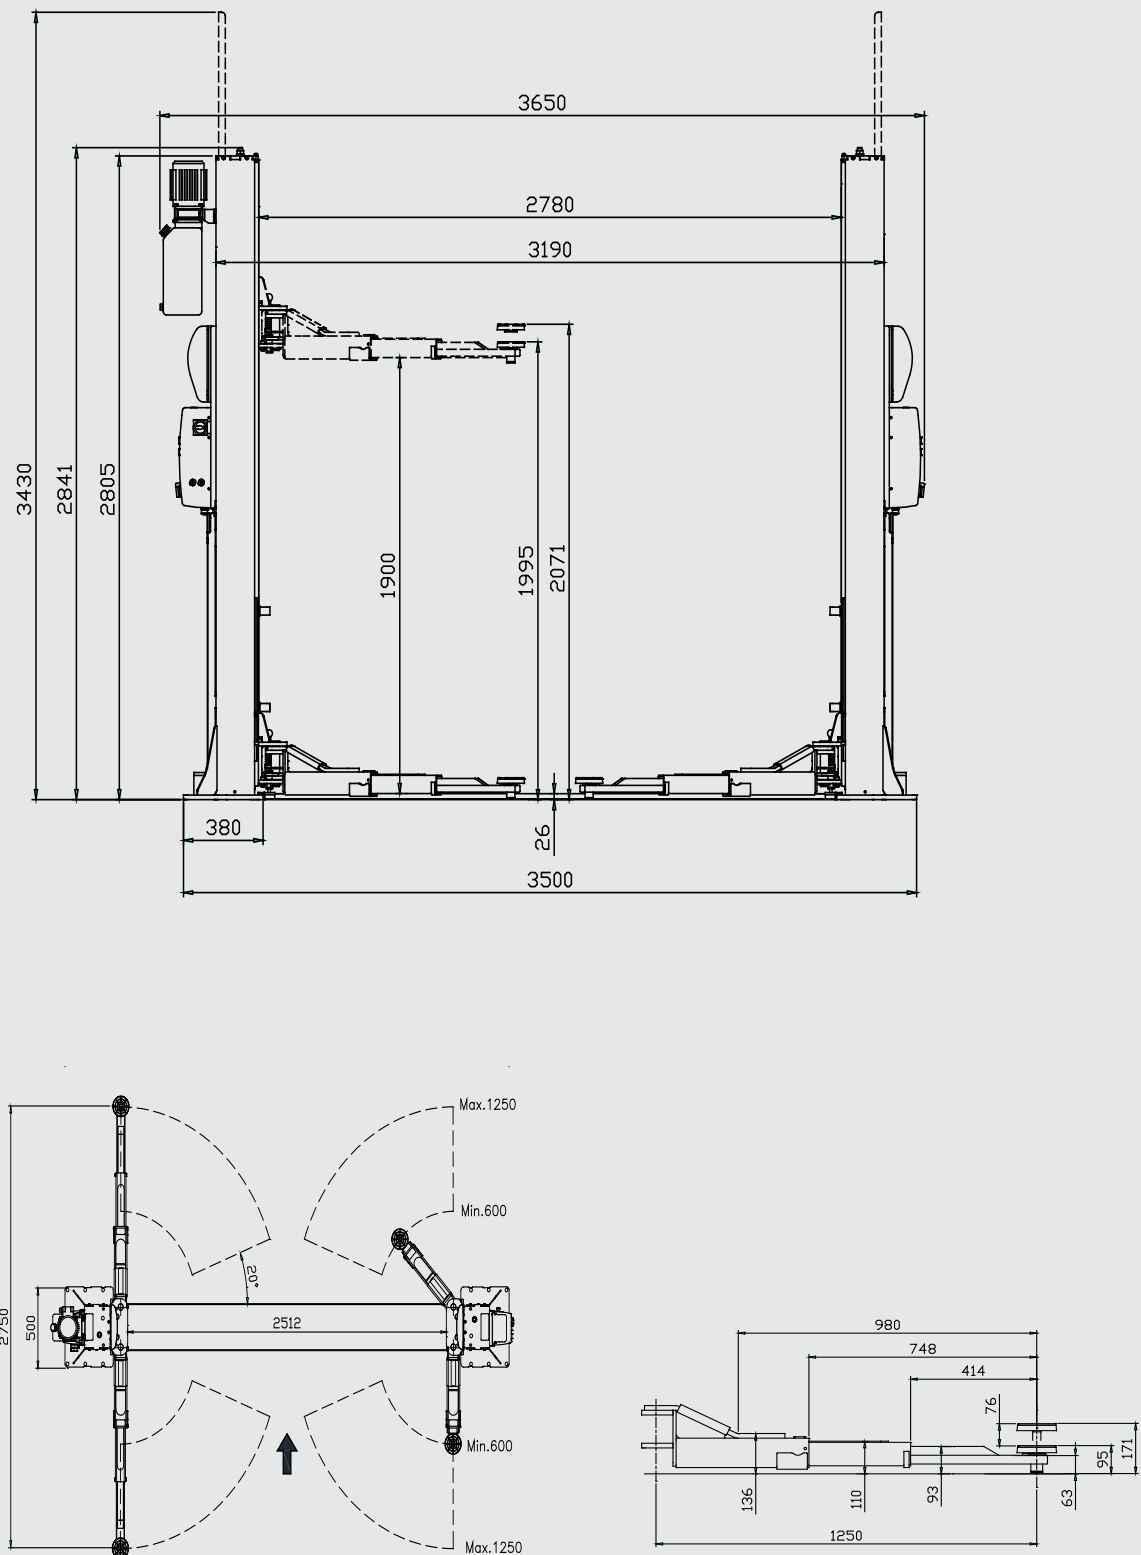

Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 09/2026.

Mascot 55 H



Electro-hydraulic 2-post lift with 5.5 t capacity

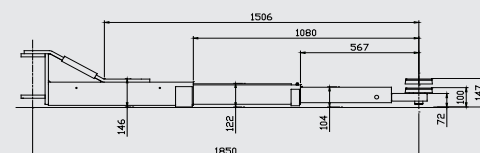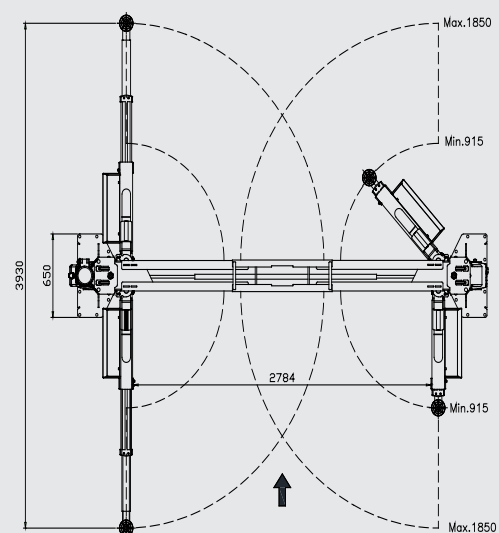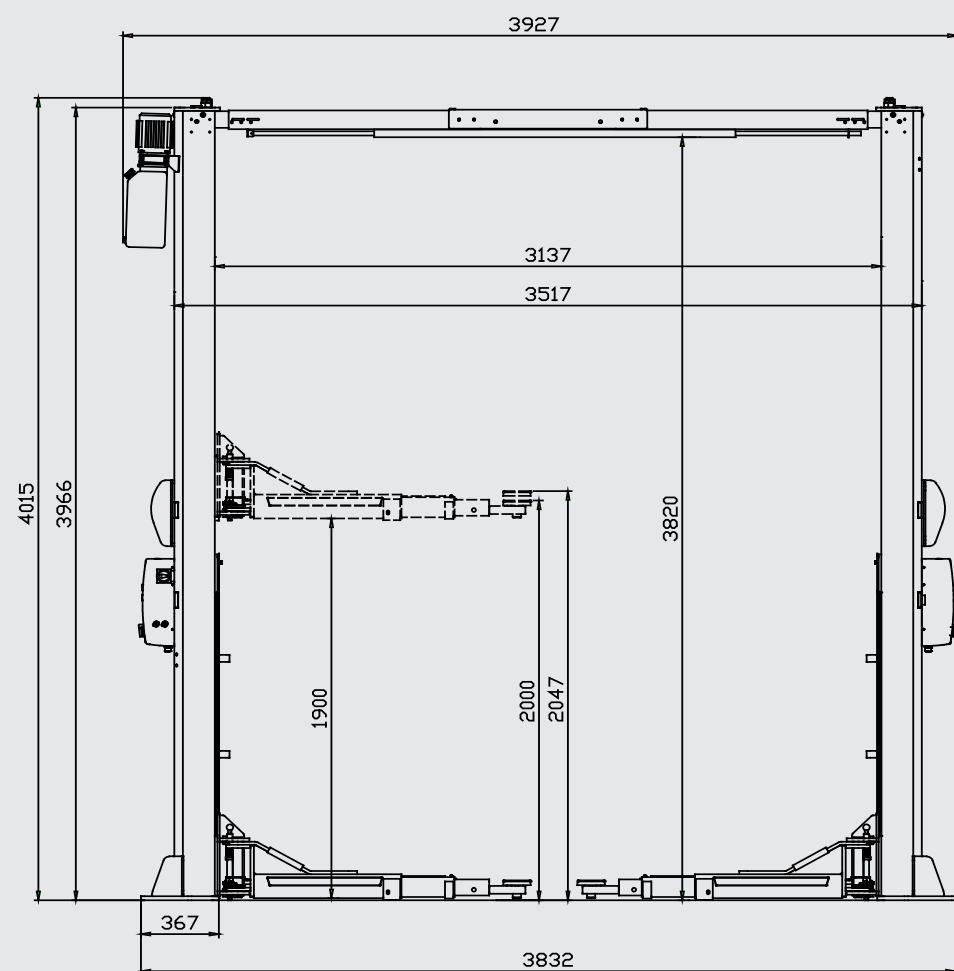

Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 09/2026


Mascot 40 M II

Electro-mechanical 2-post lift with 4 t capacity

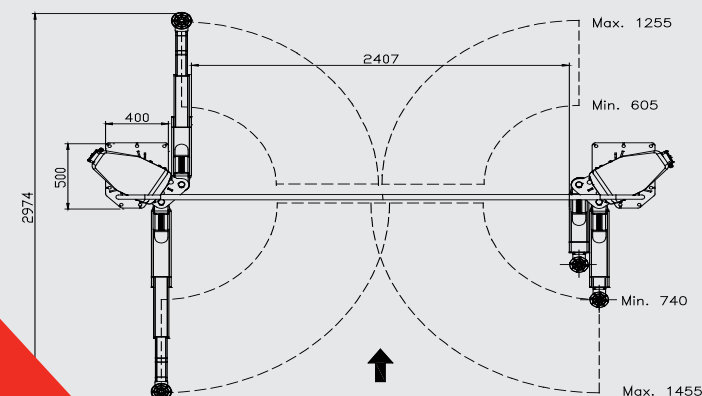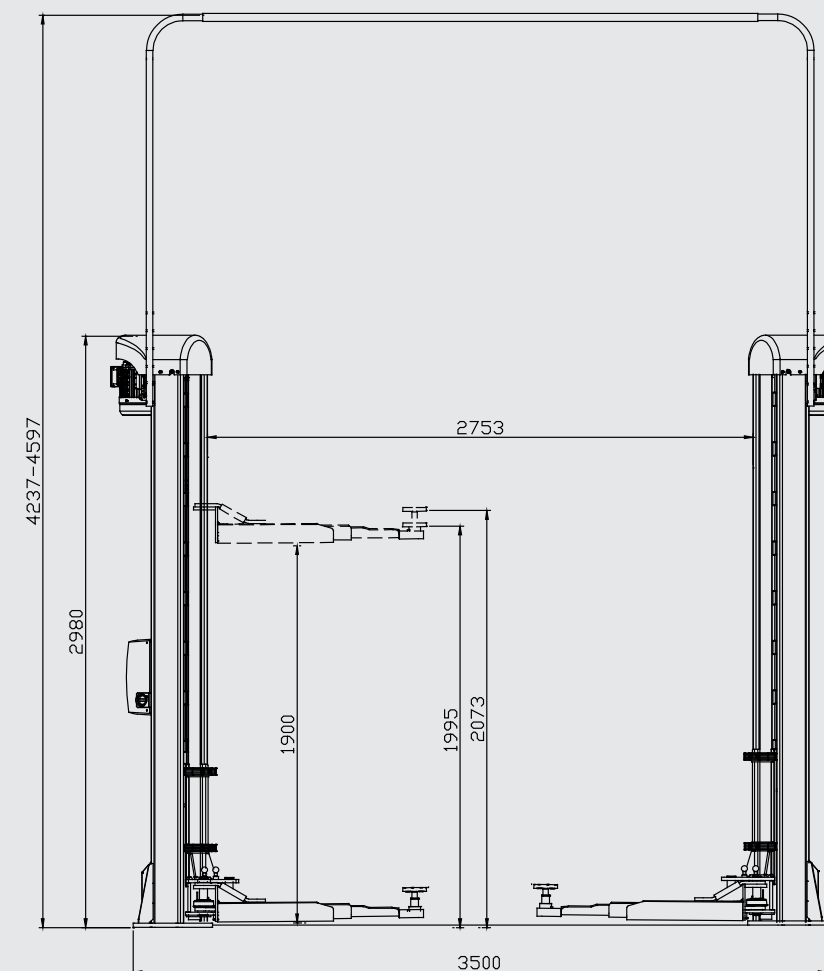


NEW

Short arm

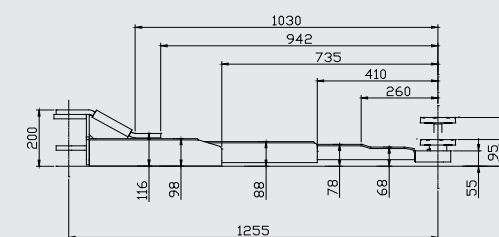


Long arm

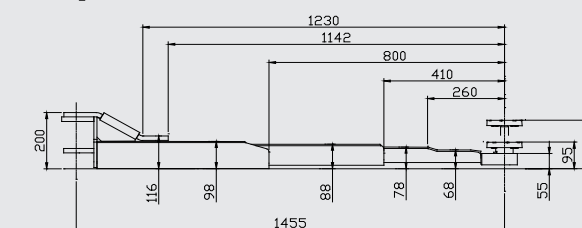

Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 09/2026.

Mascot 40H II, 40HB, 55H & 40 M II

AUTOP UPLIFTING COMPANY
STENHOJ

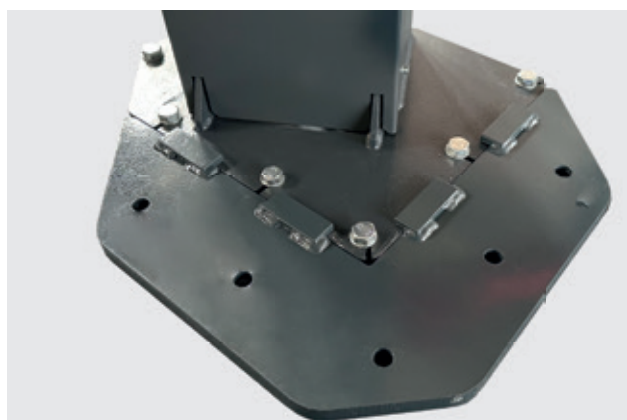

www.autopstenhoj.com

AUTOPSTENHOJ GmbH
Sandkampstr. 90 | 48432 Rheine
☎ +49 5971 8602-02
✉ info@autopstenhoj.com