

Maxi 100

Electro-hydraulic 4-post lift, 10 t capacity



Application

- ☐ Repair and maintenance

Description:

- ☐ Friction brake system in the event of cable failure
- ☐ Pneumatic parking system in height adjustable ratchets
- ☐ Pump unit with immersed motor
- ☐ Pump and control unit on front left post
- ☐ Pushbutton control unit with alarm signal
- ☐ One movable platform as standard

Standard colours:

- ☐ Platforms & posts: RAL 7016 - grey
- ☐ Ramps: RAL 3020 - red

Versions:

- ☐ Available with different voltages
- ☐ 4,600 mm flush platforms, 7,000 mm flush platforms
- ☐ 1,100 or 1,600 mm drive-on ramps
- ☐ Drive-on ramps and stops for surface-mounting; alternatively drive-over ramps for recessed installation

Optional extras:

- ☐ Set of expansion bolts
- ☐ Lighting set
- ☐ Auxiliary jack
- ☐ 3rd platform

Special colours available on request!



Scan the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH

Sandkampstraße 90
D-48432 Rheine

+49 5971 8602-02

info@autopstenhoj.com

AUTOPSTENHOJ GmbH

Barrit Langgade 188-190

DK-7150 Barrit

+45 76 82 13 30



info@autopstenhoj.com

Technical data

Lifting capacity	10,000 kg
Lifting height	1,700 mm
Stroke length	1,435 mm
Lifting / lowering time	45 sec.
Motor	3 kW
Operation	hydraulic
Voltage	3x230 / 400V-50 Hz – 25 / 16 A
Necessary air pressure min. / max.	7/10 bar

Platforms

Min. height	265 mm
Drive-through width	2,054 / 2,364 / 2,773 mm
Width between posts	2,800 / 3,120 / 3,520 mm
Total width	3,490 / 3,810 / 4,210 mm
Total height	2,354 mm
Total length	5,900 / 6,400 / 8,300 / 8,800 mm
Platform length	4,600 / 7,000 mm
Utilization area of platform	variable
Platform width	650 / 750 mm
Distance between platforms	525/775 – 720/1,060 – 1,000/1,240 mm
Wheel base	variable

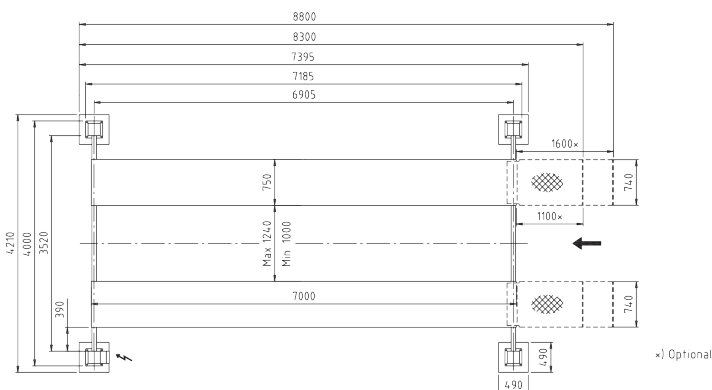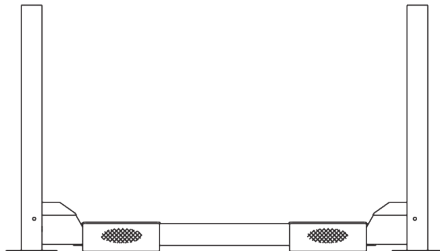

Ratchet parking system



Pump and control unit
on front left post



Auxiliary jack and lighting set