

Maestro 2.55

Electro-mechanical 2-post lift, 5.5 t capacity



Application

- ☐ Repair and maintenance

Approvals / recommendations

- ☐ Volkswagen Group

Description:

Posts:

- ☐ Symmetric post installation
- ☐ Very stable welded posts
- ☐ Without base frame
- ☐ Two motors
- ☐ Cold-rolled spindle
- ☐ Nylon nut sets
- ☐ Carriage with 6 guiding wheels and lubrication-free roller bearings
- ☐ Pushbutton control unit with alarm signal
- ☐ Programmable top stop
- ☐ Electronic synchronization

Arms:

- ☐ 4 double telescopic arms
- ☐ Internal arm locking system
- ☐ Low minimum height

Standard colours:

- ☐ Arms: RAL 3020 – red
- ☐ Posts: RAL 7016 – grey

Versions:

- ☐ Available with different voltages
- ☐ F = flex pad

Optional extras:

- ☐ Available with portal or in-ground kit
- ☐ LED-lighting set
- ☐ Power pack
- ☐ Set of expansion bolts
- ☐ Extra control unit
- ☐ Long door stops
- ☐ Wheel holders
- ☐ Large program of extra pads

Special colours available on request!



Scan the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH

Sandkampstraße 90
D-48432 Rheine

☎ +49 5971 8602-02

✉ info@autopstenhoj.com

AUTOPSTENHOJ GmbH

Barrit Langgade 188-190

DK-7150 Barrit

☎ +45 76 82 13 30


✉ info@autopstenhoj.com

Technical data

Lifting capacity	5,500 kg
Lifting height	1,900 mm
Working height	2,040 – 2,070 mm
Lifting / lowering time	approx. 55 sec.
Motor	2 x 2.8 kW
Voltage	3 x 230/400V – 50 Hz – 35/25 A

Arm superstructure


Lifting pad included in the delivery	F: 770505 (30 – 60 mm)
Min. height	140 mm
Drive-through width	2,800 – 3,000 mm
Width between posts	3,185 – 3,385 mm
Total width - outer edges posts	3,560 – 3,760 mm
Total width - outer edges base plates	3,910 – 4,110 mm
Total height post	2,908 mm
Total height incl. portal	4,910 – 5,270 mm
Arm length front, min. - max.	957 – 1,900 mm
Arm length rear, min. - max.	957 – 1,900 mm

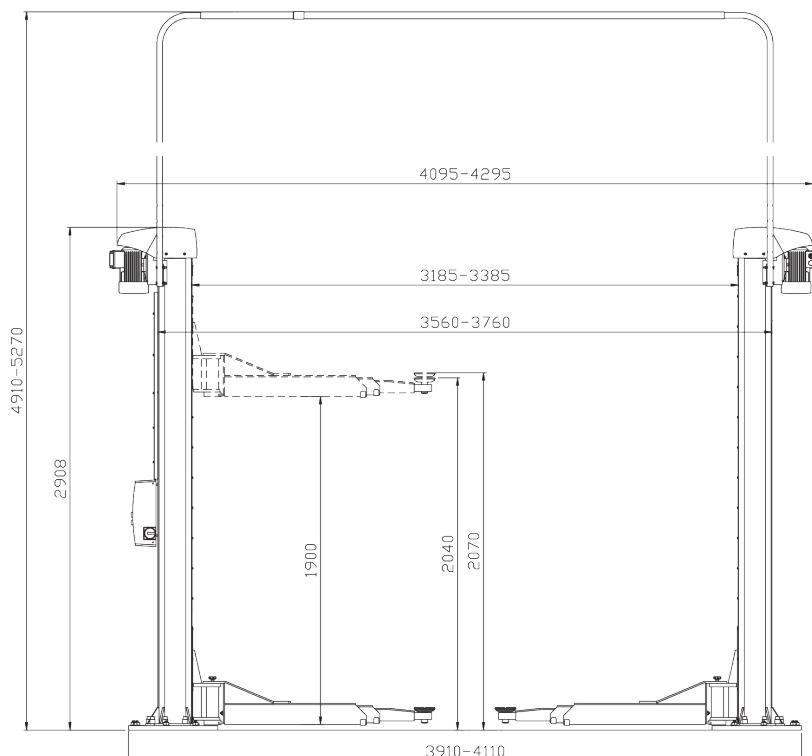

F-Pad



Stable, welded post

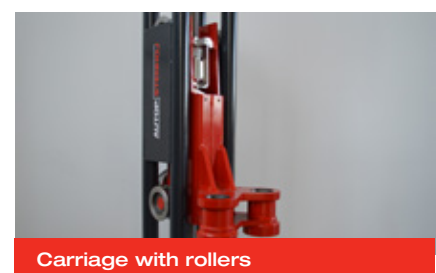

Carriage with rollers