UPLIFTING COMPANY
AUTOP STENHOJ

Maestro 2.65

Electro-mechanical 2-post lift, 6.5 t capacity





Application

- ☐ Repair and maintenance

Approvals / recommendations

- ☐ Mercedes-Benz
- ☐ Volkswagen Group

Description:

Posts:
- ☐ Symmetric post installation
- ☐ Very stable welded posts
- ☐ Without base frame
- ☐ Two motors
- ☐ Cold-rolled spindle
- ☐ Nylon nut sets
- ☐ Carriage with 6 guiding wheels and lubrication-free roller bearings
- ☐ Pushbutton control unit with alarm signal
- ☐ Programmable top stop
- ☐ Electronic synchronization

Arms:
- ☐ 4 triple telescopic arms
- ☐ Wheel bearing of the first extension arm
- ☐ Low minimum height

Standard colours:
- ☐ Arms: RAL 3020 – red
- ☐ Posts: RAL 7016 – grey

Versions:

- ☐ Available with different voltages
- ☐ F = flex pad

Optional extras:

- ☐ Available with portal or in-ground kit
- ☐ LED-lighting set
- ☐ Power pack
- ☐ Set of expansion bolts
- ☐ Extra control unit
- ☐ Wheel holders
- ☐ Large program of extra pads

Special colours available on request!

Scan the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH
Sandkampstraße 90
D-48432 Rheine
+49 5971 8602-02
info@autopstenhoj.com

Technical data	
Lifting capacity	6,500 kg
Lifting height	1,900 mm
Working height	2,075 – 2,132 mm
Lifting / lowering time	approx. 35 sec.
Motor	2 x 4 kW
Voltage	3 x 230 / 400V – 50 Hz – 20 A

Arm superstructure	
Lifting pad included in the delivery	F: 11028 (90 – 150 mm)
Min. height	175 mm
Drive-through width	2,829 mm
Width between posts	3,170 mm
Total width - outer edges posts	3,560 mm
Total width - outer edges base plates	4,000 mm
Total height post	2,908 mm
Total height incl. portal	4,910 – 5,270 mm
Arm length front, min. - max.	790 – 1,643 mm
Arm length rear, min. - max.	790 – 1,643 mm

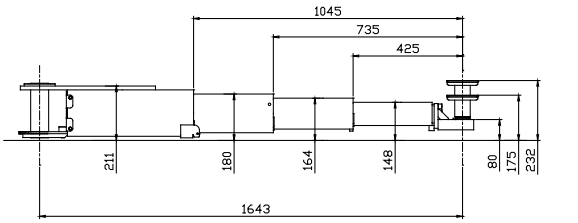

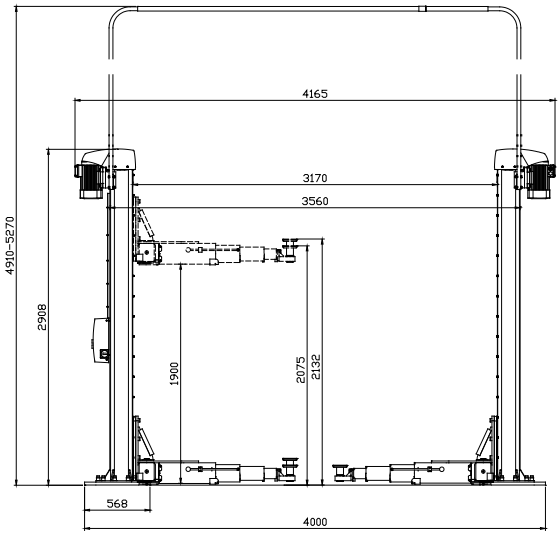

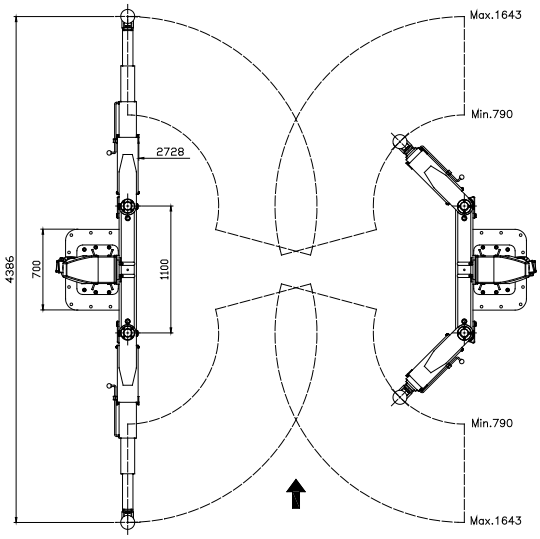



Triple telescopic arms with F-pad



Stable, welded post



Carriage with rollers

Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 01/2025