


MagiX 30 LS

Electro-hydraulic tyre lift, 3 t capacity

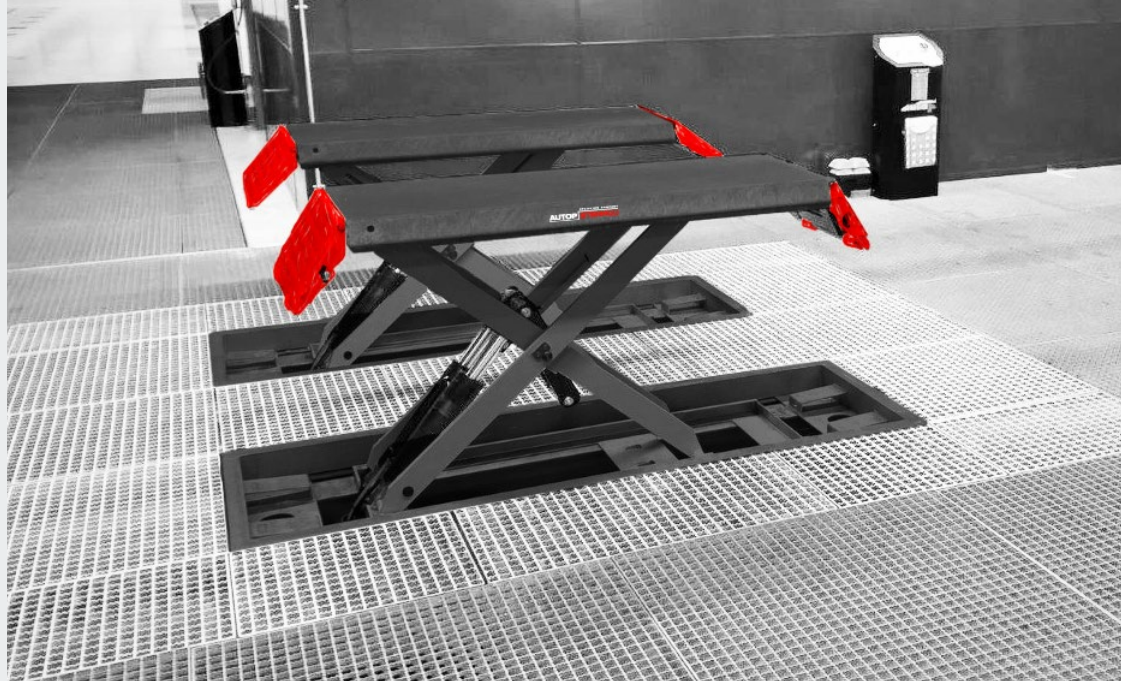

Application

- ☐ Repair and maintenance

Approvals / recommendations

- ☐ Renault

Description:

- ☐ Double master / slave system
- ☐ Control stand with integrated pump unit and alarm signal
- ☐ Electronic synchronization
- ☐ Emergency lowering valve
- ☐ Sturdy scissor construction
- ☐ No mechanical connection between scissor sections
- ☐ Optimum access to vehicle
- ☐ Low minimum height

Standard colours:

- ☐ Platforms & scissor: RAL 7016 – grey
- ☐ Ramps: RAL 3020 – red

Versions:

- ☐ Available with different voltages
- ☐ For surface-mounting or recession
- ☐ L = low
- ☐ S = superstructure on floor
- ☐ I = superstructure in floor
- ☐ G = galvanized platforms and base frame

Optional extras:

- ☐ LED-lighting set for surface-mounted versions
- ☐ Set of expansion bolts
- ☐ Set rubber blocks, 40, 60, 70, 80 and 100 mm

Special colours available on request!



Scan the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

autop Maschinenbau GmbH

Sandkampstraße 90
48432 Rheine | Germany

☎ +49 5971 8602-02

📠 +49 5971 8602-25

✉ info@autopstenhoj.com

STENHØJ A/S

Barrit Langgade 188-190
DK-7150 Barrit

☎ +45 76 82 13 30

📠 +45 76 82 13 31




✉ info@autopstenhoj.com

Technical data

Lifting capacity	3,000 kg
Lifting height	1,845 mm
Working height	960 mm + Rubber pads
Lifting / lowering time	17 / 22 sec.
Pump unit	2.2 kW
Voltage	3x230 / 400V – 50 Hz

Scissor platforms

Platform length	1,450 – 2,030 mm
Platform width	600 mm
Distance between platforms	660 mm
Min. height	105 mm
Depth of recess	0 mm

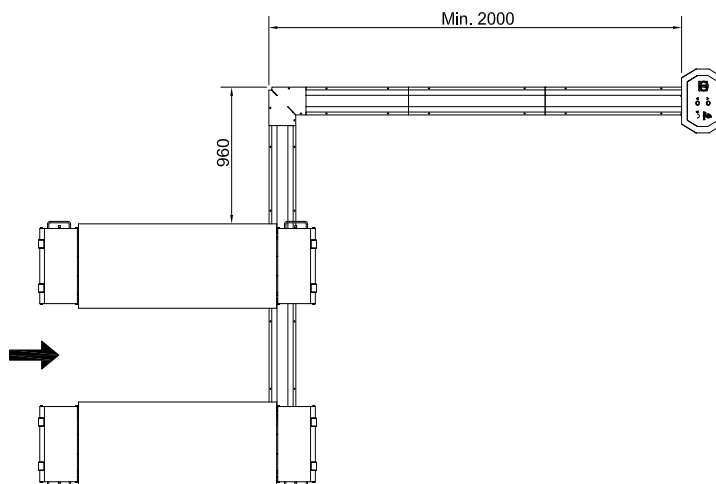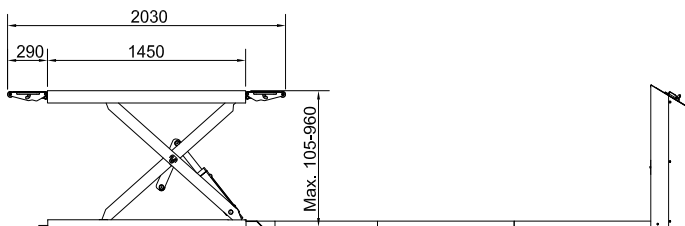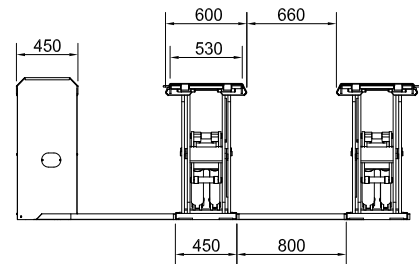

Available with galvanized base frame



Self-lubricating bearing