

# MagiX 45

Electro-hydraulic scissor lift with platforms, 4.5 t capacity



## Application

- ☐ Check-in
- ☐ Repair and maintenance
- ☐ Wheel alignment

## Approvals / recommendations

- ☐ Renault
- ☐ MS 45 S-45 & MS 45 WL-45: Volvo

## Description:

- ☐ Double master / slave system
- ☐ Control stand with integrated pump unit and alarm signal
- ☐ Electronic synchronization
- ☐ Emergency lowering valve
- ☐ Sturdy scissor construction
- ☐ No mechanical connection between scissor sections
- ☐ Optimum access to vehicle
- ☐ Low minimum height

### Standard colours:

- ☐ Platforms and scissor: RAL 7016 - grey
- ☐ Ramps: RAL 3020 - red

## Versions:

- ☐ Available with different voltages
- ☐ We recommend surface-mounted installation
- ☐ S = flush platforms, incl. guiding edges for scissor jack
- ☐ WL = with front recesses for turn tables and rear side slip plates, incl. guiding edges for scissor jack
- ☐ Combi = platforms with integrated free-wheel lift
- ☐ Also available with galvanized base frame and platforms
- ☐ 45 = 4,500 mm platforms
- ☐ 48 = 4,800 mm platforms
- ☐ 52 = 5,200 mm platforms
- ☐ Incl. drive-on ramps, stops and LED-lighting set

## Optional extras:

- ☐ Set of expansion bolts
- ☐ Set rubber blocks, 40, 60, 70, 80 and 100 mm
- ☐ Guiding edges for scissor jack for Combi-versions
- ☐ Play detector

**Special colours available on request!**



Scan the QR-Code  
for detailed product information.

Further Information on  
[www.autopstenhoj.com](http://www.autopstenhoj.com)

**AUTOPSTENHOJ GmbH**

Sandkampstraße 90

D-48432 Rheine

☎ +49 5971 8602-02

✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

**AUTOPSTENHOJ GmbH**

Barrit Langgade 188-190

DK-7150 Barrit

☎ +45 76 82 13 30

✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

**Technical data**

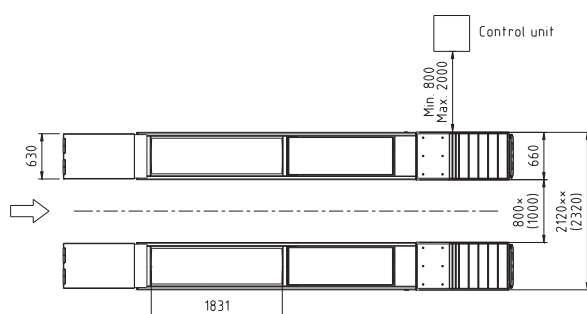
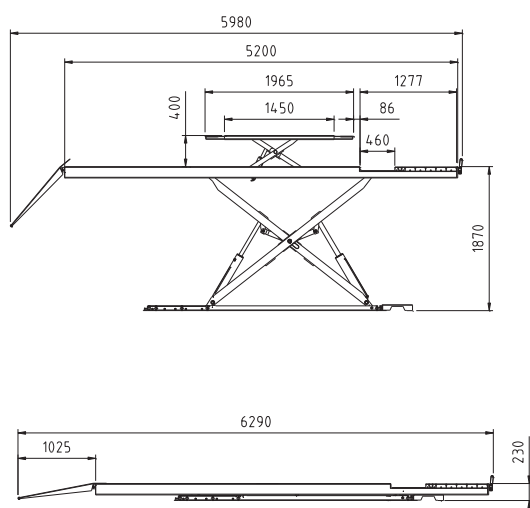
Lifting capacity	4,500 kg
Lifting height	1,900 mm (surface-mounted)
Working height	1,870 mm
Lifting / lowering time	55 sec.
Pump unit	4 kW
Voltage	3x230 / 400V – 50 Hz

**Free-wheel lift**

Lifting capacity	4,000 kg
Lifting height	400 mm
Min. height	0 mm
Lifting / lowering time	7 / 15 sec.
Operation	hydraulic
Necessary air pressure	6 bar
Length	1,450 – 1,965 mm

**Scissor platforms**

Platform length	4,500 / 4,800 / 5,200 mm
Platform width	660 mm
Distance between platforms	875 - 1,000 mm
Min. height	230 mm
Depth of recess	0 mm

**Control stand****Adjustable base frame****Infra-red sensor and fillers**