

# MagiX 50

Electro-hydraulic scissor lift with platforms, 5 t capacity



## Application

- ☐ Check-in
- ☐ Repair and maintenance
- ☐ Wheel alignment

## Approvals / recommendations

- ☐ Renault

## Description:

- ☐ Double master / slave system
- ☐ Control stand with integrated pump unit and alarm signal
- ☐ Electronic synchronization
- ☐ Emergency lowering valve
- ☐ Sturdy scissor construction
- ☐ No mechanical connection between scissor sections
- ☐ Optimum access to vehicle
- ☐ Low minimum height

## Standard colours:

- ☐ Platforms and scissors: RAL 7016 – grey
- ☐ Ramps: RAL 3020 – red

## Versions:

- ☐ Available with different voltages
- ☐ We recommend recession in floor
- ☐ S = superstructure on floor
- ☐ I = I = superstructure in floor
- ☐ W = with front recesses for turn tables and rear side slip plates, incl. guiding edges for scissor jack

- ☐ Combi = platforms with integrated free-wheel lift
- ☐ Also available with galvanized base frame and platforms
- ☐ 45 = 4,500 mm Platforms
- ☐ 48 = 4,800 mm Platforms
- ☐ 52 = 5,200 mm Platforms
- ☐ Incl. drive-over ramps, stops and LED-lighting set

## Optional extras:

- ☐ Set of expansion bolts
- ☐ Set rubber blocks, 40, 60, 70, 80 and 100 mm
- ☐ Guiding edges for scissor jack for Combi-versions
- ☐ Play detector

**Special colours available on request!**



Scan the QR-Code  
for detailed product information.

Further Information on  
[www.autopstenhoj.com](http://www.autopstenhoj.com)

#### AUTOPSTENHOJ GmbH

Sandkampstraße 90  
D-48432 Rheine

+49 5971 8602-02

info@autopstenhoj.com

#### AUTOPSTENHOJ GmbH

Barrit Langgade 188-190

DK-7150 Barrit

+45 76 82 13 30

info@autopstenhoj.com

#### Technical data




Lifting capacity	5,000 kg
Lifting height	1,810 mm
Working height	1,810 mm
Lifting / lowering time	55 sec.
Pump unit	4 kW
Voltage	3x230 / 400V – 50 Hz

#### Free-wheel lift

Lifting capacity	4,000 kg
Lifting height	400 mm
Min. height	0 mm
Lifting / lowering time	7 / 15 sec.
Operation	hydraulic
Necessary air pressure	6 bar
Length	1,450 – 1,965 mm

#### Scissor platforms

Platform length	4,500 / 4,800 / 5,200 mm
Platform width	660 mm
Distance between platforms	800 – 1,000 mm
Min. height	0 mm
Depth of recess	340 mm

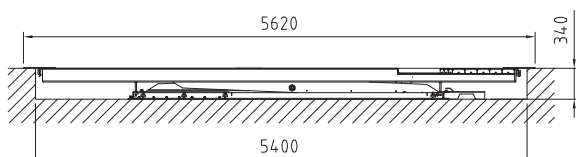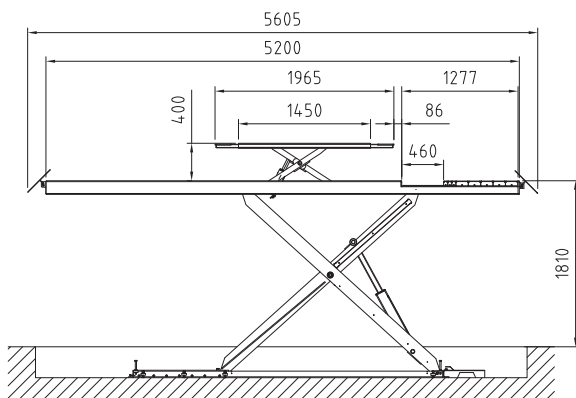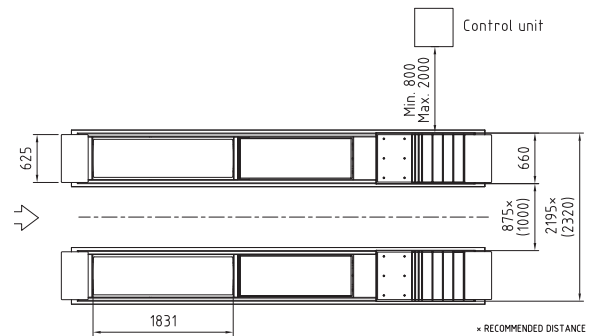

Control stand



Adjustable base frame



Infra-red sensor and fillers