

Major 4030

Electro-hydraulic 4-post lift, 4 t capacity



Application

- Check-in
- Repair and maintenance
- Wheel alignment
- MOT Testing

Approvals / recommendations

- Jaguar
- Landrover
- Renault
- Volvo

Description:

Posts:

- Integrated eccentric brake system
- Emergency stop valve
- Obstruction system
- Pneumatic parking system in height adjustable ratchets
- Pump unit with immersed motor and control unit on rear left post
- Pushbutton control unit with alarm signal
- Hydraulic cylinder under left platform
- Lifting and lowering by means of cables
- Emergency lowering valve

Platforms:

- One moveable platforms as standard
- Platforms prepared for AUTOPSTENHOJ scissor jack

Standard colours:

- Platforms & posts: RAL 7016 – grey
- Ramps: RAL 3020 – red

Versions:

- Available with different voltages
- Drive-on ramps and stops for surface-mounting, alternatively drive-over ramps for recessed installation
- S = flush platforms
- WL = with front recesses for turn tables and rear side slip plates, center cover plate between recesses and side slip plates
- G = galvanized platforms
- 42 = 4,200 mm platforms
- 47 = 4,700 mm platforms
- 51 = 5,100 mm platforms

Optional extras:

- Set of expansion bolts
- Extra control unit
- LED-lighting set
- Set of two cover plates for recesses
- Set of two 385 mm ramp extensions
- Set of two platform extensions (0.5 m)

Special colours available on request!



Scan the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com

autop Maschinenbau GmbH

Sandkampstraße 90
D-48432 Rheine
☎ +49 5971 8602-02
✉ info@autopstenhoj.com

STENHØJ A/S

Barrit Langgade 188-190
DK-7150 Barrit
☎ +45 76 82 13 30
✉ info@autopstenhoj.com

| Technical data | |
|-------------------------|---|
| Lifting capacity | 4,000 kg |
| Lifting height | 1,670 mm |
| Working height | 1,810 mm |
| Lifting / lowering time | Standard: 24 / 26 sec. D: 16 / 26 sec. |
| Pump unit | Standard: 3 kW D: 2 x 3 kW |
| Voltage | 3x230 / 400V – 50 Hz – 25 / 16 A |

| Platforms | |
|---------------------------------------|------------------|
| Total length | 5,560 / 5,980 mm |
| Usable length of platform | 4,680 / 5,100 mm |
| Wheel base, min. - max. | variable |
| Platform width | 550 mm |
| Distance between platforms | 805 – 1,285 mm |
| Min. height | 140 / 160 mm |
| Width between posts | 3,000 mm |
| Total width - outer edges base plates | 3,422 mm |
| Total height | 2,233 mm |

Also available as inspection lifts:

As standard equipped with re-inforced posts and larger cable diameter for intensive usage in inspection centres.
As standard delivered with:


P = play detector (pneumatically operated for both lateral and rotational movement, for axle load up to 3 t), operation with wireless hand lamp

Option:


D = double pump unit for quicker lifting time. Control unit on front left post



Ratchet for parking position

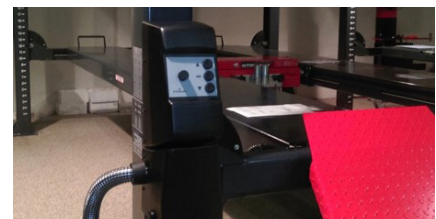

Control unit and power pack on rear left post

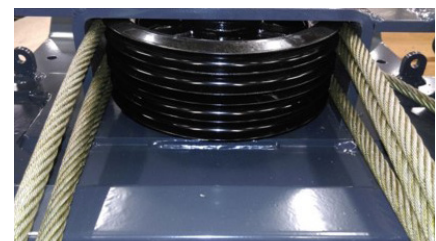

Pulley with steel cable

