


Biglift 2.55 F 480

Electro-hydraulic twin-ram lift, 5.5 t with platforms

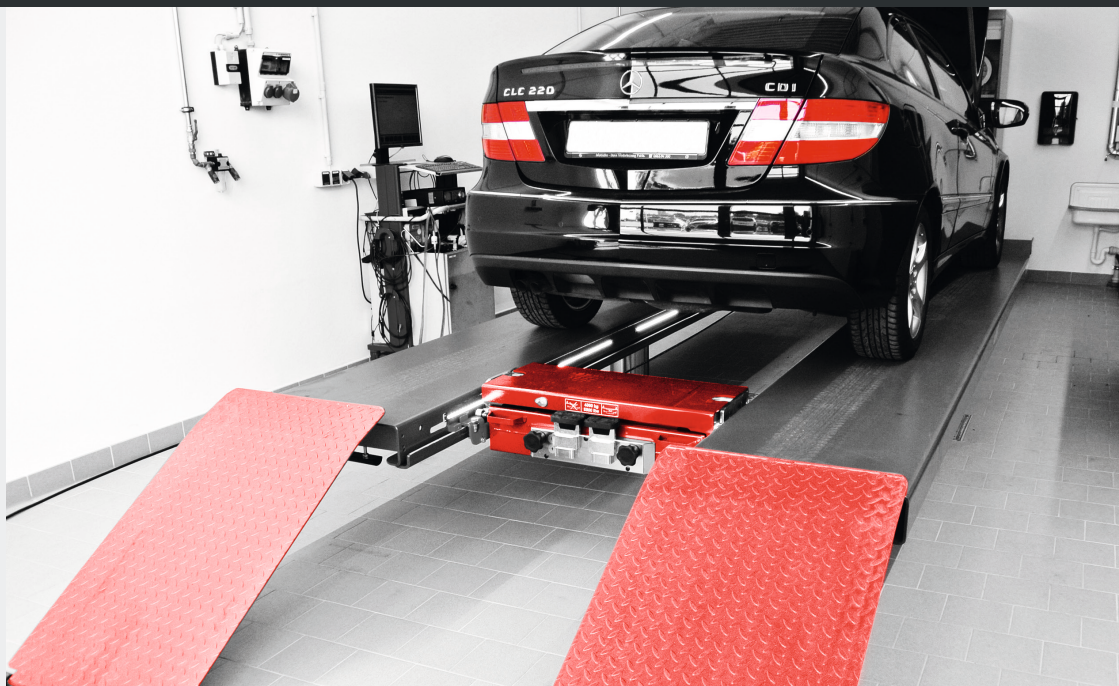

Application

- ☐ Check-in
- ☐ Repairs and maintenance
- ☐ Testing

Description:

Steel cassette:

- ☐ Waterproof steel cassette

Hydraulic unit:

- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit
- ☐ Great stability, even with uneven weight distribution; due to the cylinder diameter of 213 mm

Superstructure:

- ☐ A set of platforms with drive-on ramps and stops

Standard colours

- ☐ Platforms: RAL 7016 - grey
- ☐ Ramps: RAL 3020 - red

Versions:

Steel cassette:

- ☐ Zinc-coated
- ☐ Coated

Installation:

- ☐ Superstructure on floor
- ☐ Superstructure in floor

Optional extras:

- ☐ LED-lighting set
- ☐ Scissor jack

Zinc coating and special colours on request!



Scan the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH

Sandkampstraße 90
D-48432 Rheine

+49 5971 8602-02

info@autopstenhoj.com

AUTOPSTENHOJ GmbH

Barrit Langgade 188-190

DK-7150 Barrit

+45 76 82 13 30

info@autopstenhoj.com

Technical data


| | |
|--|----------------------------|
| Lifting capacity | 5,500 kg |
| Lifting height | 1,865 mm |
| Working height | 2,030 mm |
| Cylinder diameter | 2 x 213 mm |
| Distance between cylinders | 1,550 mm |
| Lifting / lowering time (high pressure) | approx. 45 sec. |
| Foundation depth | 2,625 mm |
| Pump unit | 3 kW |
| Hydraulic oil | 17 l |
| Voltage | 230 / 400 V – 50 Hz – 16 A |

Platforms

| | |
|----------------------------|------------------|
| Total length | approx. 6,100 mm |
| Usable length of platform | 4,800 mm |
| Wheel base | 4,300 mm |
| Platform width | 650 mm |
| Distance between platforms | 900 mm |
| Drive-on height | 165 mm |

Scissor jack (Option)

| | |
|------------------|-------------------------|
| Lifting capacity | 2,600 Kg |
| Lifting height | 250 mm |
| Operation | air-hydraulic |
| Lift positions | middle / 790 – 1,460 mm |

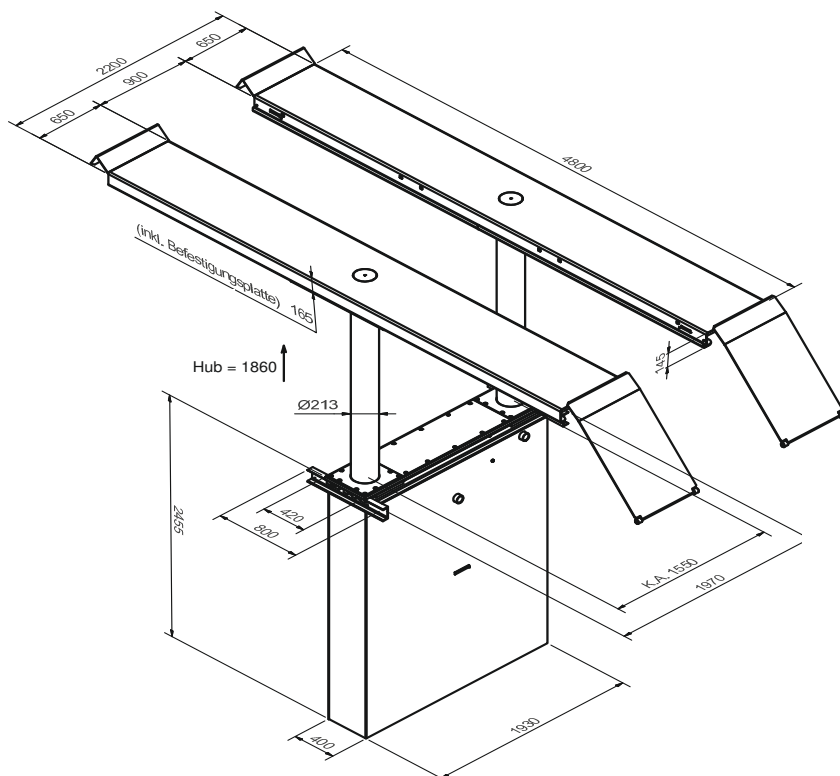

Scissor jack



Non-skid surface



LED lighting set