Biglift 2.65 Saaa

Electro-hydraulic twin-ram lift, 6.5 t capacity, superstructure with arms





Application

- ☐ Repairs and maintenance
- ☐ Body work

Approvals / recommendations

- ☐ Saaa 145: Volkswagen Group
- ☐ Saaa 230: Renault, Volkswagen Group
- ☐ Saaa 265: Mercedes-Benz, Volkswagen Group

Description:

Steel cassette:
- ☐ Waterproof steel cassette

Hydraulic unit:
- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit
- ☐ Great stability, even with uneven weight distribution; due to the cylinder diameter of 213 mm

Superstructure:
- ☐ Triple telescopic arms
- ☐ Wheel bearing of the first extension arm
- ☐ Low minimum height

Saaa 265:
- ☐ Mechanical ratchet system integrated in the hydraulic unit
- ☐ Air preparation unit for oiled and regulated compressed air (min . 6 bar / max . 10 bar)

Standard colours
- ☐ Base plates: RAL 7016 - grey
- ☐ Arms: RAL 3020 - red

Versions:

- ☐ Saaa 145, Saaa 230, Saaa 265

Steel cassette:
- ☐ Zinc-coated
- ☐ Coated
- ☐ Self-carrying (Saaa 230)

Installation:
- ☐ Superstructure on floor
- ☐ Superstructure in floor with covers
- ☐ Ceiling installation

Optional extras:

- ☐ Large program of extra pads

Zinc coating and special colours on request!

Click the QR-Code
for detailed product information.


Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH
Sandkampstraße 90
D-48432 Rheine
+49 5971 8602-02
info@autopstenhoj.com

Technical data	
Lifting capacity	6,500 kg
Lifting height	1,845 mm
Working height	1,943 - 1,990 mm
Cylinder diameter	2 x 213 mm
Distance between cylinders	Saaa 145: 1,350 mm Saaa 230: 2,150 mm Saaa 265: 2,650 mm
Lifting / lowering time (high pressure)	approx. 45 sec.
Foundation depth	2,625 mm
Pump unit	3 kW
Hydraulic oil	18 l
Voltage	230 / 400 V – 50 Hz – 16 A

Arm superstructure	
Total width	3,350 mm
Lifting pad included in the delivery	16008 (98 – 145 mm)
Min. height	75 mm
Drive-through width	Saaa 230: 1,930 mm Saaa 265: 2,430 mm
Arm length, min. - max.	790 – 1,640 mm

Serienausstattung:
min. ca. 98 mm
max. ca. 145 mm
(andere Steckpilze auf Anfrage)

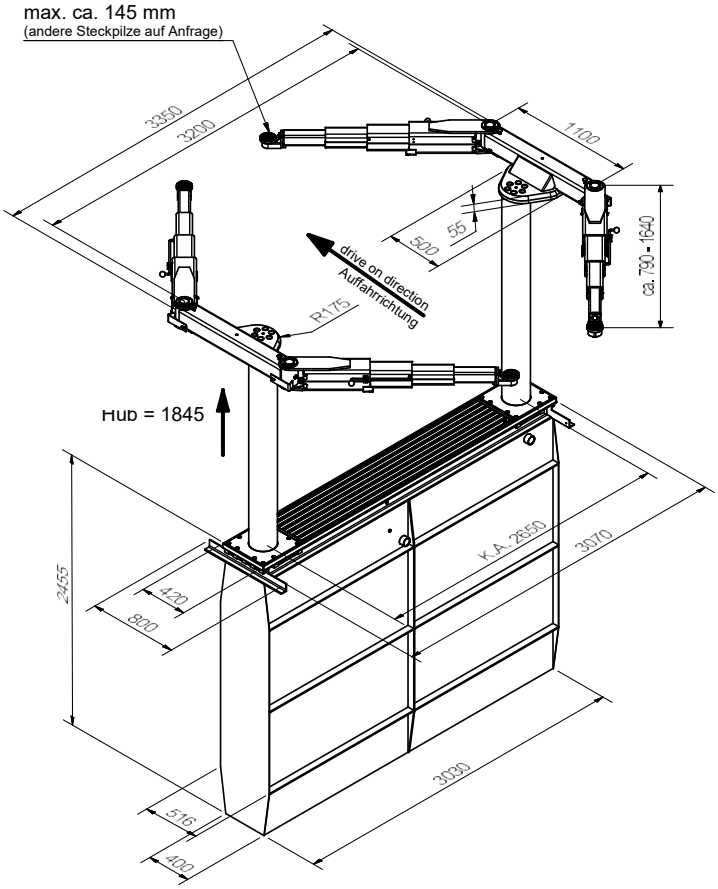



Triple telescopic arms
with roller bearings



Arm locking system

Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 10/2026