
# Biglift 4.55 Combi

Electro-hydraulic 2x twin-ram lift, 5.5 t capacity, platforms and free-wheel lift with arms



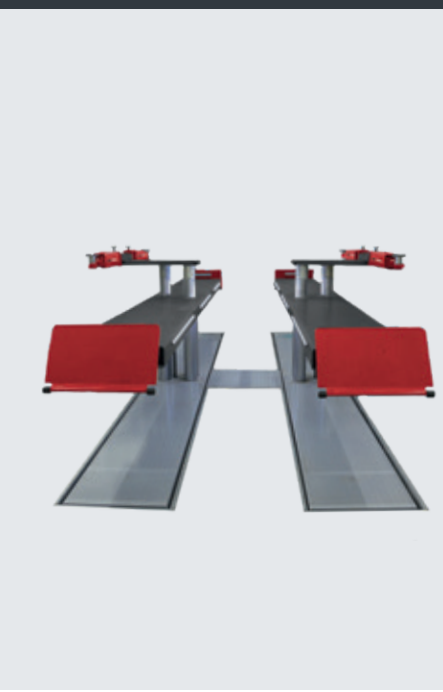

## Application

- ☐ Check-in
- ☐ Repairs and maintenance
- ☐ Testing

## Approvals / recommendations

- ☐ Mercedes Benz
- ☐ Volkswagen Group

## Description:

**Steel cassette:**
- ☐ Waterproof steel cassette

**Hydraulic unit:**
- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit great stability, even with uneven weight distribution (all 4 cylinders in operation)

**Superstructure:**
- ☐ A set of platforms with drive-on ramps and stops

**Free-wheel device Saav:**
- ☐ Double telescopic arms, crosswise adjustable
- ☐ Internal arm locking system
- ☐ Low minimum height

**Standard colours**
- ☐ Platforms: RAL 7016 - grey
- ☐ Saav: Base plates RAL 7016 - grey, arms and sliders RAL 3020 - red
- ☐ Ramps: RAL 3020 - red

## Versions:

**Steel cassette:**
- ☐ Zinc-coated
- ☐ Coated

**Installation:**
- ☐ Superstructure on floor
- ☐ Superstructure in floor with or without flush floor device

## Optional extras:

- ☐ LED-lighting set
- ☐ Large program of extra pads

**Zinc coating and special colours on request!**

Click the QR-Code
for detailed product information.


Further Information on
www.autopstenhoj.com

**AUTOPSTENHOJ GmbH**
Sandkampstraße 90
D-48432 Rheine
+49 5971 8602-02
info@autopstenhoj.com

| Technical data | |
|---|---|
| Lifting capacity | 5,500 kg |
| Lifting height | 1,890 mm |
| Working height | F: 2,052 mm<br>RFH 2,150 - 2,197 mm |
| Cylinder diameter | 8 x 140 mm |
| Distance between cylinders | 1,240 – 1,850 mm |
| Lifting / lowering time (high pressure) | approx. 38 sec. |
| Foundation depth | 2,625 mm |
| Pump unit | 3 kW |
| Hydraulic oil | 20 l |
| Voltage | 230 / 400 V – 50 Hz – 16 A |

| Arm superstructure | |
|---|---|
| Total width | 3,134 mm |
| Lifting pad included in the delivery | 16008 (95 – 145 mm) |
| Min. height | 75 mm |
| Arm length, min. - max. | 720 – 1,415 mm |

| Platforms | |
|---|---|
| Total length | approx. 6,800 mm |
| Usable legth of platform | 5,500 mm |
| Wheel base | approx. 5,000 mm |
| Platform width | 650 mm |
| Distance between platforms | 900 mm |
| Drive-on height | 165 mm |

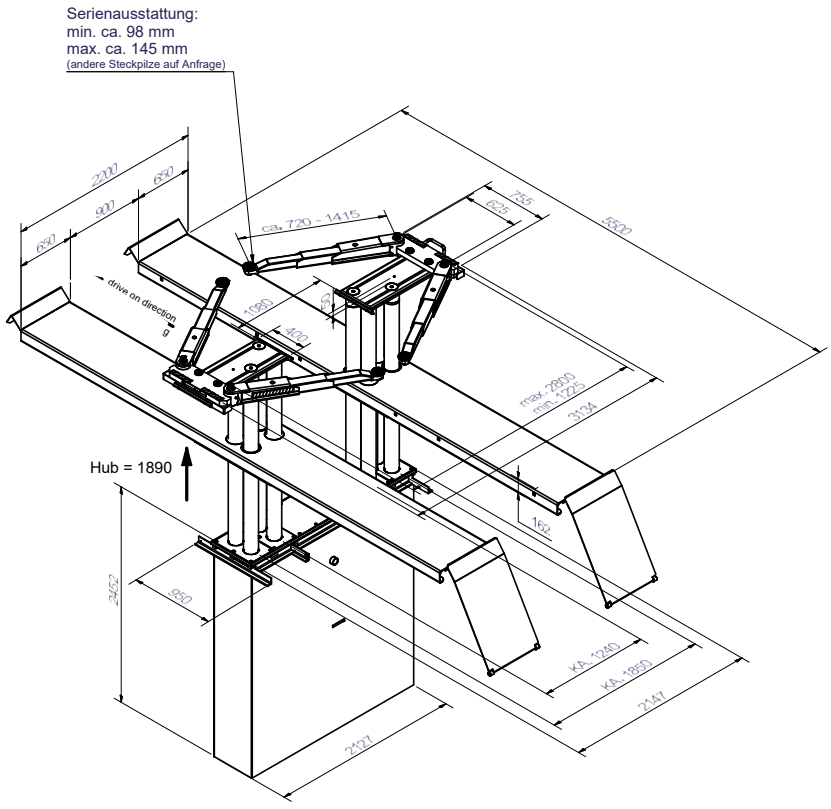




Sturdy lift with Saav free-wheel lift



LED lighting set



Slidable superstructure

Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 10/2026