


Eurolift 2.30 Pv

Electro-hydraulic twin-ram lift, 3 t capacity, superstructure with flat lifting supports

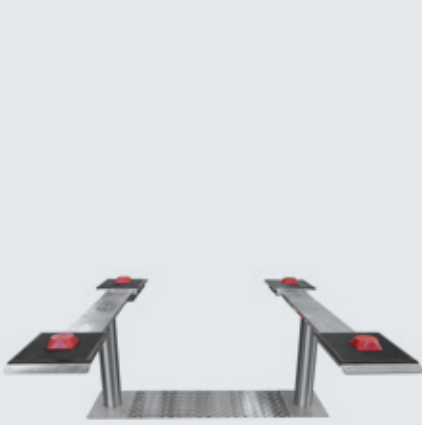

Application

- Check-in
- Wash
- Repairs and maintenance
- Testing

Description:

Steel cassette:

- Waterproof steel cassette

Hydraulic unit:

- Hard-chrome plated cylinder
- Integrated anti-rotation device
- Corrosion-free guiding elements
- Pump unit with immersed motor for fitting on wall
- Non-hazardous hydraulic oil
- Pneumatic emergency lowering
- Programmable pushbutton control unit

Superstructure:

- Stable lifting supports, lengthwise adjustable (120 – 180, 140 – 200, 160 – 220)
- Rubber-coated, non-skid pads
- Low minimum height

Standard colours:

- Zinc-coated

Versions:

Steel cassette:

- Zinc-coated
- Coated
- Self-carrying

Installation:

- Superstructure on floor
- Superstructure in floor
- Ceiling installation

Optional extras:

- XY-pads
- Sets of rubber blocks, 40, 60, 80 and 100 mm
- Traverse

Zinc coating and special colours on request!



Click the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com

AUTOPSTENHOJ GmbH

Sandkampstraße 90
D-48432 Rheine
☎ +49 5971 8602-02
✉ info@autopstenhoj.com

AUTOPSTENHOJ GmbH

Barrit Langgade 188-190
DK-7150 Barrit
☎ +45 76 82 13 30
✉ info@autopstenhoj.com

Technical data	
Lifting capacity	3,000 kg
Lifting height	1,950 mm
Working height	2,020 mm + rubber pads
Cylinder diameter	2 x 123 mm
Distance between cylinders	1,335 mm
Lifting / lowering time (high pressure)	approx. 30 sec.
Foundation depth	2,625 mm
Pump unit	3 kW
Hydraulic oil	10 l
Voltage	230 / 400 V – 50 Hz – 16 A

Pv superstructure	
Total length min. – max.	120-180: approx. 1,200 – 1,800 mm 140-200: approx. 1,400 – 2,000 mm 160-220: approx. 1,600 – 2,200 mm
Min. height	70 mm

