

Masterlift 2.35 Saav 135 VAN

Electro-hydraulic twin-ram lift, 3.5 t capacity, superstructure with adjustable arms



Application

- ☐ Repairs and maintenance

Approvals / recommendations

- ☐ Jaguar
- ☐ Mercedes-Benz
- ☐ Renault
- ☐ Volkswagen Group

Description:

Steel cassette:

- ☐ Waterproof steel cassette

Hydraulic unit:

- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit

Superstructure:

- ☐ Double-telescopic arms
- ☐ Internal arm locking system
- ☐ Low minimum height
- ☐ Suitable for wheel supports

Standard colours:

- ☐ Base plates: RAL 7016 - grey
- ☐ Arms and slider: RAL 3020 - red

Versions:

Steel cassette:

- ☐ Zinc-coated
- ☐ Coated
- ☐ Self-carrying

Installation:

- ☐ Superstructure on floor
- ☐ Ceiling installation

Versions:

- ☐ Sport & Universal versions

Optional extras:

- ☐ Large program of extra pads

Zinc coating and special colours on request!



Click the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH


Sandkampstraße 90
D-48432 Rheine
☎ +49 5971 8602-02
✉ info@autopstenhoj.com

AUTOPSTENHOJ GmbH

Barrit Langgade 188-190
DK-7150 Barrit
☎ +45 76 82 13 30
✉ info@autopstenhoj.com

Technical data	
Lifting capacity	3,500 kg
Lifting height	1,950 mm
Working height	2,045 - 2,124 mm
Cylinder diameter	2 x 123 mm
Distance between cylinders	1,335 mm
Lifting / lowering time (high pressure)	approx. 30 sec.
Foundation depth	2,625 mm
Pump unit	3 kW
Hydraulic oil	10 l
Voltage	230 / 400 V – 50 Hz – 16 A

Arm superstructure	
Total width	3,210 mm
Lifting pad included in the delivery	Uni: 16007 (95-174 mm) Sport: 16006 (78-110 mm)
Min. height	Uni: 95 - 174 mm Sport: 78 - 110 mm + 50 mm height extension
Arm length, min. - max.	710 – 1,443 mm

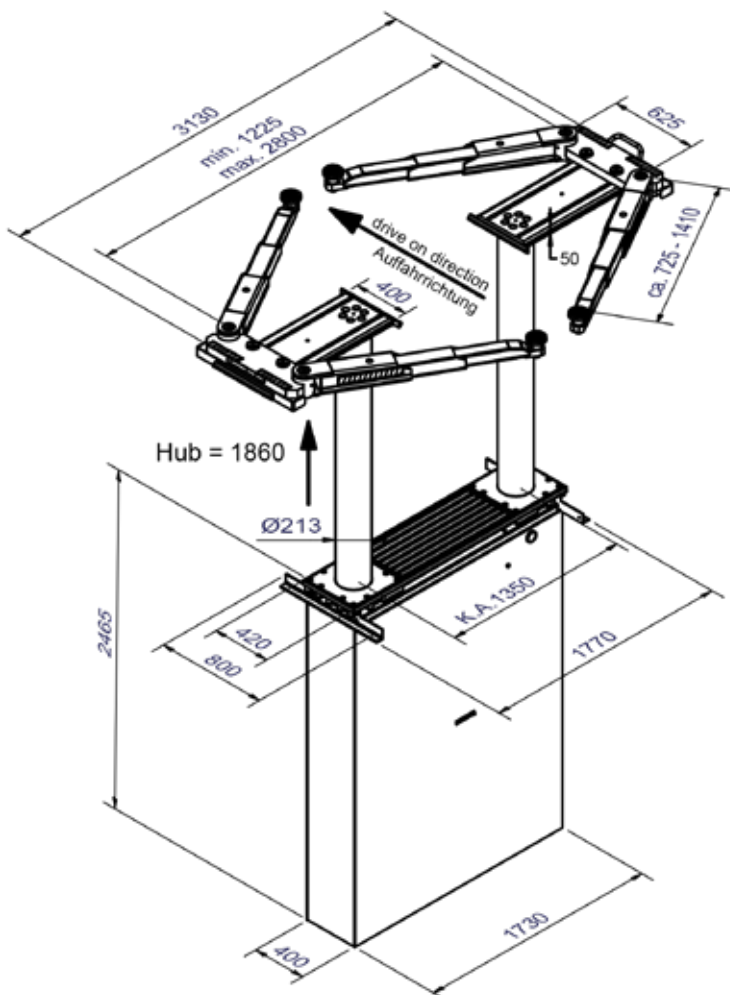

Slidable superstructure



Superstructure with lifting pads



Internal arm locking system