


Mono Drive-On

High pressure and semi-hydraulic lift, 3 t capacity

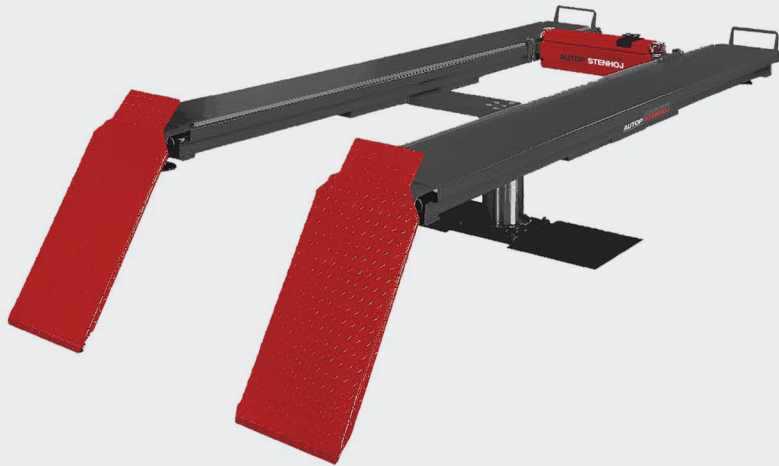

Application

- ☐ Repairs and maintenance

Description:

- ☐ Hard-chrome plated cylinder
- ☐ 4,180 mm flush platforms
- ☐ 900 mm drive-on ramps
- ☐ Semi-hydraulic with manouvering valve
- ☐ High pressure for either single or central operation (up to 6 lifts)
- ☐ Available with anti-rotation device
- ☐ Available with pilot valve

Standard colours:

- ☐ Platforms: RAL 7016 - grey
- ☐ Ramps: RAL 3020 - red

Versions:

- ☐ A = flush platforms Drive-on ramps and stops

Optional extras:

- ☐ Safety leg
- ☐ Installation frame
- ☐ Scissor jack
- ☐ Protection bag
- ☐ Set of two 1,300 mm drive-on ramps



Scan the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

autop Maschinenbau GmbH

Sandkampstraße 90
48432 Rheine | Germany

☎ +49 5971 8602-02

☎ +49 5971 8602-25

✉ info@autopstenhoj.com

STENHØJ A/S

Barrit Langgade 188-190
DK-7150 Barrit

☎ +45 76 82 13 30

☎ +45 76 82 13 31

✉ info@autopstenhoj.com

Technical data

Lifting capacity	3,000 kg
Lifting height	1,750 mm
Cylinder diameter	238 mm
Lifting / lowering time (high pressure)	approx. 35 sec
Foundation depth	2,600 mm
Pump unit	3 kW
Hydraulic oil	High pressure: 8 / 40 l Semi-hydraulic: 140 l
Necessary constant air pressure	10 bar
Voltage	230 / 400 V – 50 Hz – 16 A

Platforms

Min. height	194 mm
Total width	1,902 mm
Usable length of platform	4,180 mm
Platform width	500 mm
Distance between platforms	902 mm
Wheel base, min. - max.	variable

