


Testmaster TL40

Testlane

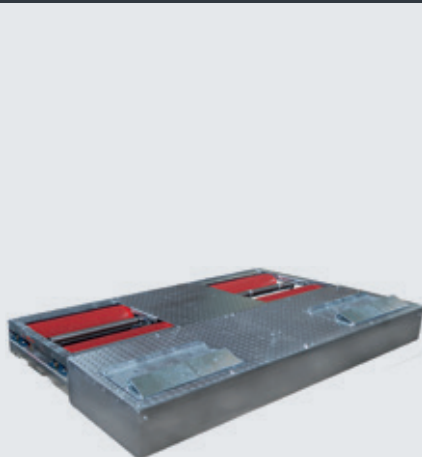

Application

- ☐ Check-in
- ☐ Repair and maintenance
- ☐ Testing
- ☐ General inspection

Description:

- ☐ Galvanized, enclosed roller set
- ☐ Wear resistant 205 mm rollers with welded profile surface
- ☐ Test width: 800 mm to 2,200 mm (optional 800 - 2,800 mm)
- ☐ Height adjustment screws
- ☐ Wear resistant and modern electronic strain gauge measuring system
- ☐ 50 mm sensor rollers
- ☐ Prepared for retrofitting of weighing device
- ☐ Modular system, all roller sets can be extended to test lanes
- ☐ Compact electric / switchbox, prepared for upgrade
- ☐ Drive-over axle load 4 t (optional 5 t)
- ☐ Brake force 4,5 kN (optional 6 kN)
- ☐ Equipped as standard with drive-off system
- ☐ Manual / Automatic mode
- ☐ Delayed switch-on, start-up monitoring
- ☐ Testing program for electronic parking brakes
- ☐ Lockable main switch
- ☐ Suspension tester Boge system, galvanized bottom group
- ☐ Galvanized test plates
- ☐ Large easily read analog display
- ☐ Optionally with large easily read analogue display or with PC-connection kit and PC software

Optional extras:

- ☐ Test width 800 - 2,800 mm
- ☐ Foundation frame
- ☐ Permanent formwork
- ☐ Plastic-coated rollers
- ☐ Pneumatic lowering/ lifting device
- ☐ Raising kit
- ☐ Suspension tester
- ☐ Tramming plate
- ☐ Manually reversible rotation and measuring device
- ☐ Automatic four wheel recognition (patented)
- ☐ EDOS (Easy drive-out system - patented)
- ☐ Roller cover plate
- ☐ Remote control
- ☐ LED digital display
- ☐ Pedal force meter
- ☐ Weighing device
- ☐ PC connection & ASA live stream
- ☐ Minicomputer ASA live stream
- ☐ PC software display, basic, test lane and office

Special equipment on request!

Versions:

- ☐ Galvanized roller set and suspension tester
- ☐ Wear resistant 205 mm rollers with welded profile surface
- ☐ Electrical / switch box with motor protection, control electronics, lockable main switch, 12 m pre-cabled





Scan the QR-Code
for detailed product information.
Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH
Sandkampstraße 90
D-48432 Rheine
☎ +49 5971 8602-02
✉ info@autopstenhoj.com


AUTOPSTENHOJ GmbH
Barrit Langgade 188-190
DK-7150 Barrit
☎ +45 76 82 13 30
✉ info@autopstenhoj.com

Technical data - roller set

Drive-over load	4,000 kg
Test speed	5 km/h
Motors	2 x 3 kW (option 2 x 4 kW)
Roller diameter	205 mm
Test width	800 - 2,200 mm (option 800 - 2,800 mm)
Brake force	4.5 kN (option 6 kN)
Test load	at 50% braking 2 t (option 2,6 t)

Suspension tester

Drive-over load	4,000 kg
Test load	2.6 t
Motors	2 x 1.2 kW
Fuse	3 x 20 A inert
Power supply	3 x 400 V, N, PE 50 Hz
Dimensions, analogue display (W x H x D)	810 x 670 x 70 mm
Dimensions, roller set (L x W x H)	2,320 x 680 x 240 mm
Dimensions, suspension tester (W x L x H)	2,320 x 800 x 280 mm

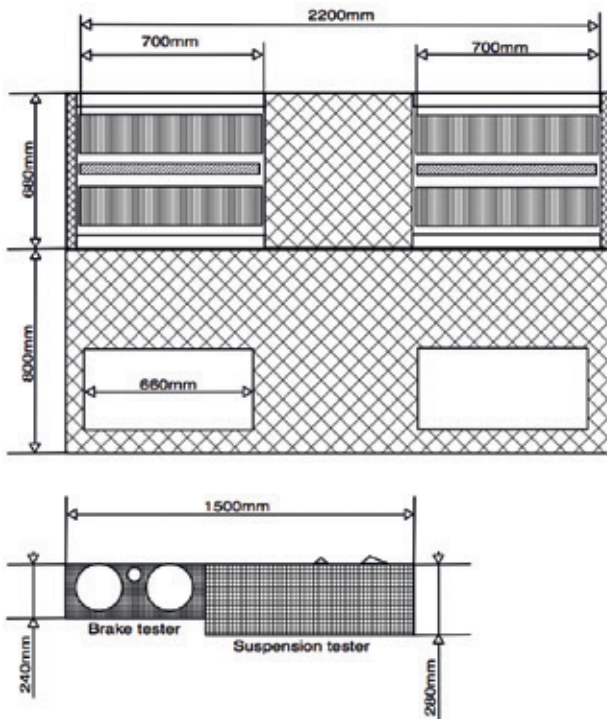

Additional accessories at www.autopstenhoj.com

