


Major 4000–6000 MOT/ATL

Electro-hydraulic 4-post lift with 4.0, 4.8, 5.2 & 6.5 t capacity

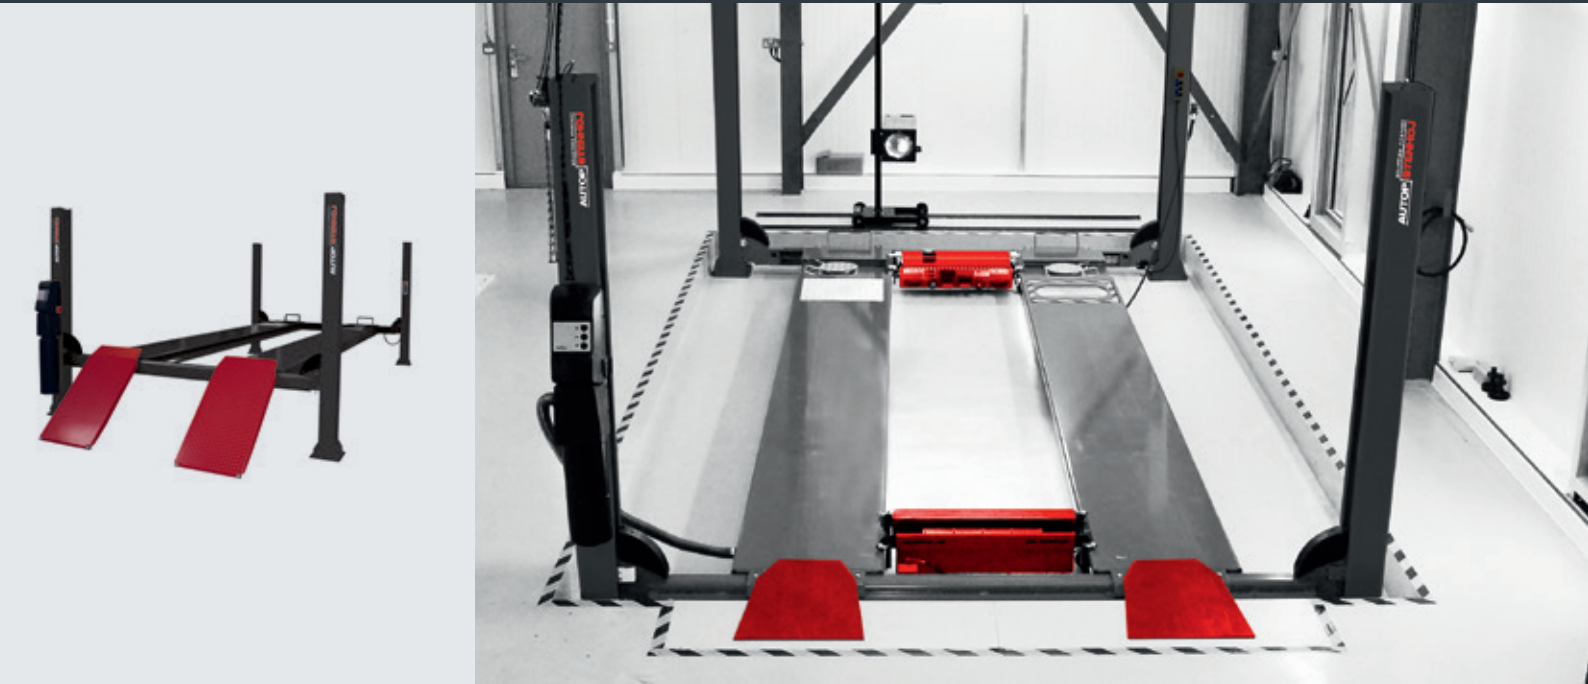

Application

- ☐ Check-in
- ☐ Repair and maintenance
- ☐ Testing

Description:

- ☐ Integrated eccentric brake system
- ☐ Emergency stop valve
- ☐ Obstruction system
- ☐ Pneumatic parking system in height adjustable ratchets
- ☐ Pump unit with immersed motor and control unit on rear left post; delivered with extra control unit for front right post
- ☐ Pushbutton control unit with alarm signal
- ☐ Hydraulic cylinder under left platform
- ☐ Lifting and lowering by means of cables
- ☐ Emergency lowering valve
- ☐ Both platforms fixed
- ☐ Platforms prepared for AUTOPSTENHOJ scissor jack

Standard colours:

- ☐ Platforms & Posts: RAL 7016 – grey
- ☐ Ramps: RAL 3020 – red

Versions:

- ☐ Available with different voltages
- ☐ Available with different platform lengths

Special colours available on request!

MOT Lifts:

Worldwide accepted inspection lifts which have been specified and constructed according to UK MOT requirements. MOT lifts are as standard delivered with front recesses with turntables and extra control unit for operation from front right post. Drive-on ramps and stops for surface-mounting, alternatively drive-over ramps for recessed installation.

ATL Lifts:

Worldwide accepted inspection lifts which have been specified and constructed according to UK MOT and ATL (automated test lanes VOSA) requirements. ATL lifts are as standard delivered with front recesses with turntables and extra control unit for operation from front right post; ATL lifts are furthermore equipped with re-inforced posts and larger cable diameter and a play detector (pneumatically operated for both lateral and rotational movement, for axle load up to 3 t), operation with wireless hand lamp. Drive-on ramps and stops for surface-mounting, alternatively drive-over ramps for recessed installation
 WL = with front recesses for turn tables and rear side slip plates, center cover plate between recesses and side slip plates



Scan the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH

Sandkampstraße 90
D-48432 Rheine
☎ +49 5971 8602-02
✉ info@autopstenhoj.com

AUTOPSTENHOJ GmbH

Barrit Langgade 188-190
DK-7150 Barrit
☎ +45 76 82 13 30
✉ info@autopstenhoj.com

Technical data

Lifting capacity, bis	6,500 kg
Lifting height	1,670 mm
Working height	1,810 – 1,840 mm
Lifting / lowering time	4 t = 24 / 26 sec. 4.8 & 5.2 t = 32 / 26 sec. 6.5 t = 40 / 58 sec.
Pump unit	3 kW
Voltage	400/3/50 – 240/1/50

Optional extras:

- ☐ Set expansion bolts
- ☐ LED-lighting set
- ☐ Set of two cover plates for recesses
- ☐ Set of two 385 mm ramp extensions
- ☐ Set of two platform extensions (0.5 m)
- ☐ Set of two cover plates


* Dimension sketches to be found on our website.



Turn table



Wireless hand lamp for play detector

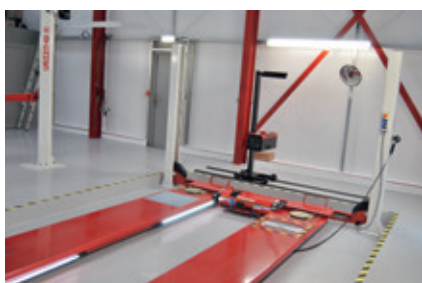

Ratchet for parking position