AUTOP STENHOJ

Major 5529-55 WL

Electro-hydraulic 4-post lift, 5.5 t capacity





Application

- Check-in
- □ Repair and maintenance
- Wheel alignment
- Testing

Description:

Posts:

- □ Integrated eccentric brake system
- Emergency stop valve
- Obstruction system
- Pneumatic parking system in height adjustable ratchets
- Pump unit with immersed motor and control unit on rear left post
- Pushbutton control unit with alarm signal
- □ Hydraulic cylinder under left platform
- Lifting and lowering by means of cables
- Emergency lowering valve

Platforms:

- One moveable platforms as standard
- Platforms with tolerances of only max ±1.0 mm lengthand crosswise and ±0.5 mm from left to right
- Distance pieces covering the entire length, fixated by steel edges in sides
- Platforms prepared for AUTOPSTENHOJ scissor jack with innovative air supply
- Platforms on stable cross beams

Standard colours:

- Spray-galvanized functional surfaces; platforms and posts: RAL 7016 grey
- Ramps: RAL 3020 red

Versions:

- Available with different voltages
- Drive-on ramps and stops for surface-mounting, alternatively drive-over ramps for recessed installation
- WL = with front and rear recesses for turn tables. Side slip plates available as optional extra.
- □ 55 = 5,500 mm platforms

Optional extras:

- □ Set of expansion bolts
- Extra control unit
- LED-lighting set
- □ Zinc coating of platforms

Special colours available on request!

UPLIFTING COMPANY





Scan the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com


AUTOPSTENHOJ GmbH


Sandkampstraße 90 D-48432 Rheine

- **L** +49 5971 8602-02
- info@autopstenhoj.com

| Technical data | |
|-------------------------|---------------------------------|
| Lifting capacity | 5,500 kg |
| Stroke length | 1,690 mm |
| Working height | 1,920 mm |
| Lifting / lowering time | 40 / 58 sec. |
| Pump unit | 3 kW |
| Voltage | 3x230/400V - 50 Hz - 16 A inert |

| Platforms | |
|--|----------|
| Total length | 7,455 mm |
| Usable length of platform | 5,500 mm |
| Wheel base, min max. | variable |
| Platform width | 650 mm |
| Distance between platforms | 900 mm |
| Drive-on height | 230 mm |
| Width between posts | 2,900 mm |
| Total width - outer edges base plates | 3,332 mm |
| Total height | 2,235 mm |

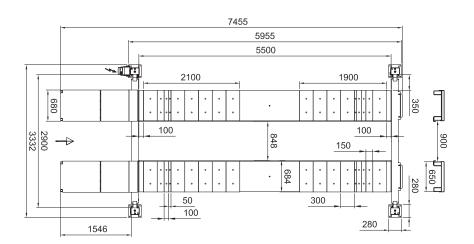

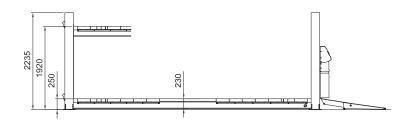





Ratchet for parking position

