

# MagiX 43-46

Electro-hydraulic scissor lift with platforms, 4.3 t capacity



## Application

- ☐ Check-in
- ☐ Repair and maintenance
- ☐ Wheel alignment

## Approvals / recommendations

- ☐ Volvo

## Description:

- ☐ Control unit with integrated pump unit, alarm signal and digital height indication
- ☐ Electronic synchronization
- ☐ Emergency lowering valve
- ☐ Sturdy scissor construction
- ☐ No mechanical connection between scissor sections
- ☐ Optimum access to vehicle
- ☐ Variable installation width

## Standard colours:

- ☐ Platforms and scissor: RAL 7016 grey
- ☐ Short drive-over ramps: cold galvanized
- ☐ Long drive-on ramps and floor ramps: painted

## Versions:

- ☐ Available with different voltages
- ☐ S = Flush platforms
- ☐ WL = With front recesses for turn tables and rear side slip plates
- ☐ C (Combi) = Platforms with integrated free-wheel lift
- ☐ P (play detector) = platform with play detector
- ☐ Incl. guiding edges for scissor jack for all models as standard
- ☐ Base frame galvanized as standard
- ☐ 46 = 4,650 mm platforms
- ☐ Play detector with 6 movement directions

## Optional extras:

- ☐ Set of expansion bolts
- ☐ Set of rubber blocks, 80 mm
- ☐ KTL coating for platforms
- ☐ LED lightning set
- ☐ Installation frame for recessed installation
- ☐ Air hydraulic scissor jack

**Special colours available on request!**



Scan the QR-Code  
for detailed product information.

Further Information on  
[www.autopstenhoj.com](http://www.autopstenhoj.com)

#### AUTOPSTENHOJ GmbH

Sandkampstraße 90  
D-48432 Rheine  
☎ +49 5971 8602-02  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

#### AUTOPSTENHOJ GmbH


Barrit Langgade 188-190  
DK-7150 Barrit  
☎ +45 76 82 13 30  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

#### Technical data

Lifting capacity	4,300 kg
Lifting height	1,850 mm
Working height	2,090 mm
Lifting / lowering time	50 sec.
Pump unit	3 kW
Voltage	3x230 / 400V – 50 Hz

#### Free-wheel lift

Lifting capacity	3,500 kg
Lifting height	400 mm
Min. height	0 mm
Lifting / lowering time	8 / 8 sec.
Operation	hydraulic
Length	1,420 – 2,100 mm

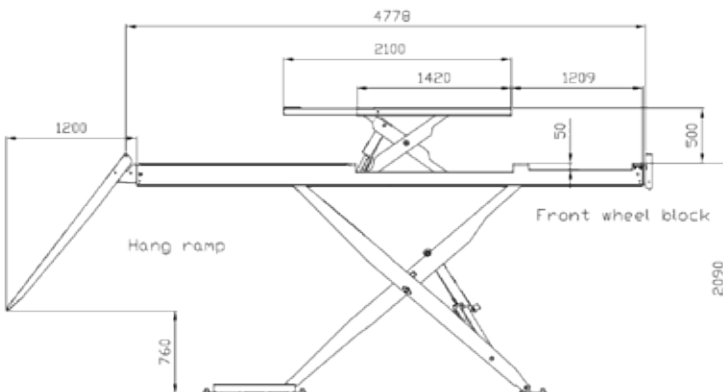


1) Floor ramp  
2) Hang ramp

Drive-on direction →

#### Scissor platforms

Platform length	4,650 mm
Platform width	630 mm
Distance between platforms	800 – 1,020 mm
Min. height	240 mm
Depth of recess	0 mm

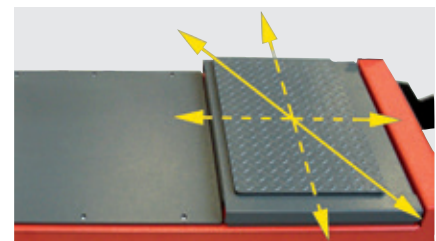


Play detector with 6  
movement directions



Control unit



Safety ratchet

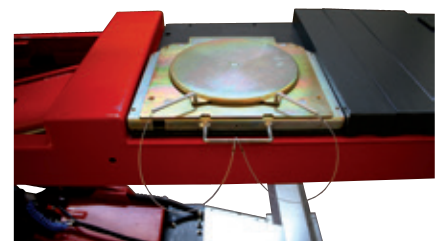

Recess for turn tables