

Masterlift 2.30 Sa 260 Supersport

Electro-hydraulic twin-ram lift, 3.0 t capacity, superstructure with arms



Application

- ☐ Repairs and maintenance
- ☐ Body work

Description:

Steel cassette:

- ☐ Waterproof steel cassette

Hydraulic unit:

- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Hydraulic pump unit with immersed motor
- ☐ Ecological hydraulic fluid
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit

Superstructure:

- ☐ Two extra-flat sports arms, single telescopic
- ☐ Simple arm locking system
- ☐ Low minimum height

Standard colours:

- ☐ Base plates: RAL 7016 - grey
- ☐ Arms: RAL 3020 - red

Versions:

Steel cassette:

- ☐ Zinc-coated
- ☐ Coated
- ☐ Self-carrying

Installation:

- ☐ Superstructure on floor
- ☐ Ceiling installation

Optional extras:

- ☐ Large program of extra pads

Zinc coating and special colours on request!



Click the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH

Sandkampstraße 90
D-48432 Rheine

☎ +49 5971 8602-02

✉ info@autopstenhoj.com

AUTOPSTENHOJ GmbH

Barrit Langgade 188-190

DK-7150 Barrit

☎ +45 76 82 13 30


✉ info@autopstenhoj.com

Technical data


Lifting capacity	3,000 kg
Lifting height	1,960 mm
Working height	2,030 - 2,055 mm
Cylinder diameter	2 x 140 mm
Distance between cylinders	2,600 mm
Lifting / lowering time (high pressure)	approx. 30 sec.
Foundation depth	2,625 mm
Pump unit	3 kW
Hydraulic oil	10 l
Voltage	230 / 400 V – 50 Hz – 16 A

Arm superstructure

Total width	3,000 mm
Lifting pad included in the delivery	29265 (70 – 95 mm)
Min. height	70 – 95 mm
Drive-through width	2,455 mm
Arm length, min. - max.	760 – 1,252 mm

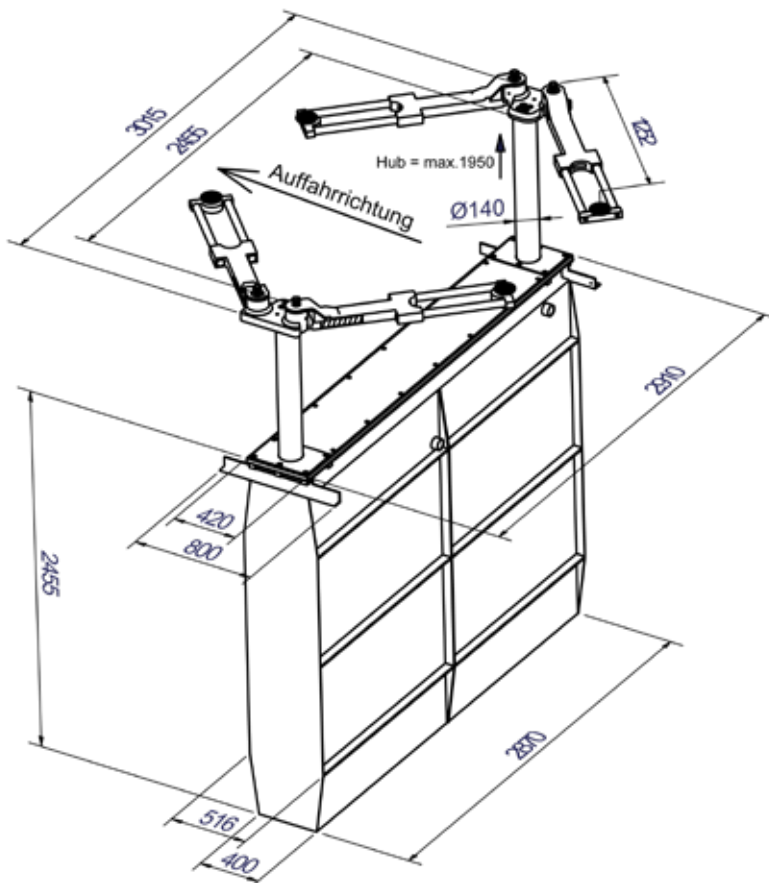

Extra flat superstructure

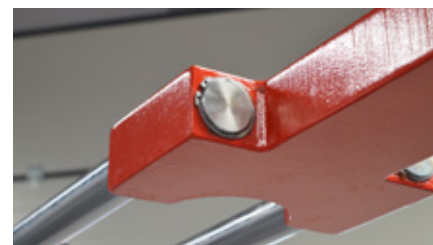

Double guided arm extension



Can be combined with pad extension