

Electro-hydraulic twin-ram lift, 3.5 t with repair platforms

**NxT Generation - Inground lifts** 


**NxT Generation** 



convincing.


make the Masterlift 2.35 NxT the perfect helper in

your workshop. Optionally, longitudinally adjustable supports can be supplied instead of the xy function.

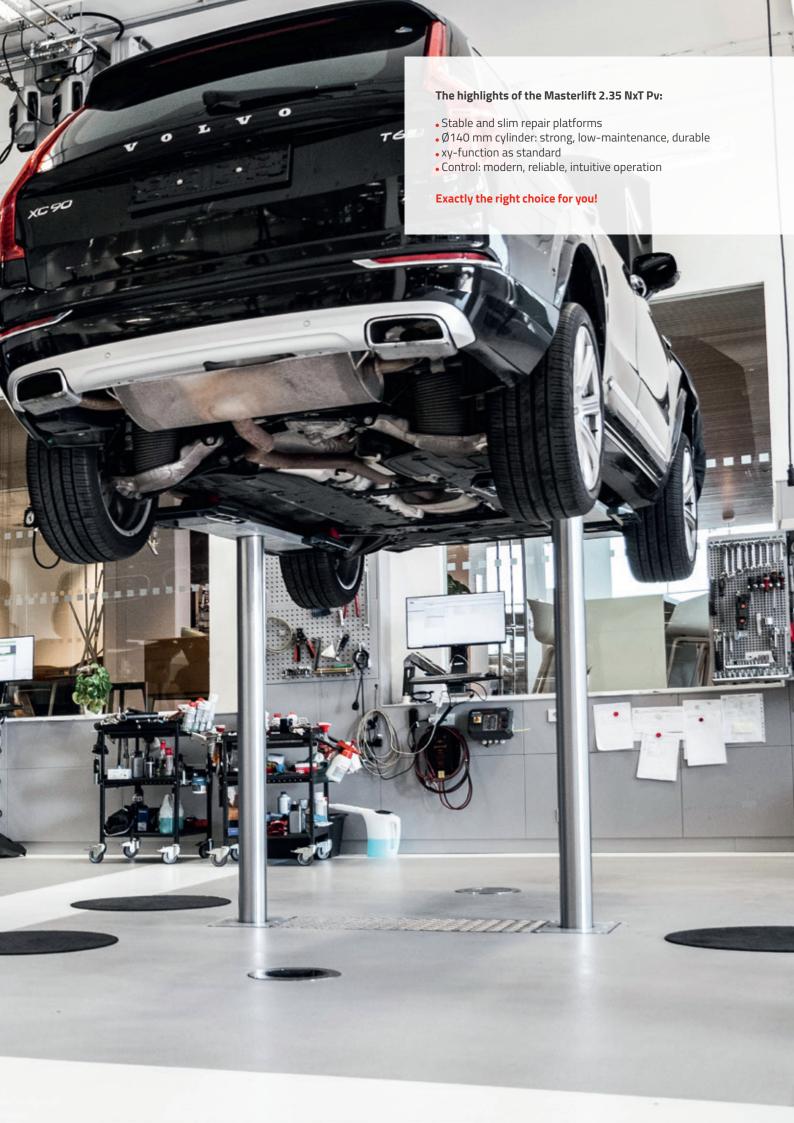



Electro-hydraulic twin-ram lift, 3.5 t with repair platforms

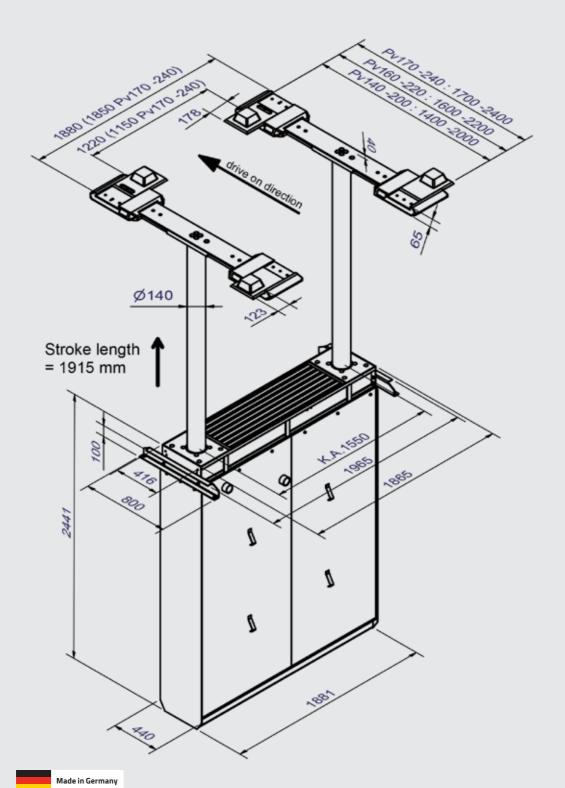



#### **Technical data**

Lifting capacity	3500 kg
Stroke length	1915 mm
Working height	1980 mm + rubber pads
Cylinder diameter	2 x 140 mm
Cylinder distance	1550 mm
Lifting / Lowering time	~ 30 sec.
Foundation depth	2640 mm
Pump unit	3.0 kW
Hydraulic fluid	10
Voltage	230/400 V / 50 Hz / 16 A

#### Pv superstructure

Total length, minmax.	140-200: 1400 - 2000 mm 160-220: 1600 - 2200 mm 170-240: 1700 - 2400 mm
Drive-over height	65 mm

#### Standard colour:

- Pv Premium: zink coated and painted RAL 9006
- Pv Standard: hot-dip galvanized, without painting

#### Options:

- Longitudinally adjustable supports
- Rubber blocks in different heights

#### Variants:

- Synchronisation and safety via
- synchronisation bar
- toothed rack
- Self-supporting installation, without load on the bottom of the sub-casing

#### Installation variants:

- On-floor installation
- Recessed installation (only for Pv Premium)
- Ceiling installation

#### Frame:

• Standard: completely hot-dip galvanized

#### Sub-casing:

- Standard: painted
- Optional: hot-dip galvanized or plastic-coated













## And even more highlights: Inground technology reinvented!

With the **NxT Generation** inground lifts from AUTOPSTENHOJ you experience quality at the very highest level! We have made the best even better for you!

**NxT Generation inground lifts**: Flexible in installation and operation, also adaptable to possible, changing requirements in the future, due to our smart clamping system.

Synchronisation takes place either via a synchronisation bar or alternatively via a toothed rack. We achieve maximum stability through strong 140 mm cylinders and through our new aluminium guidance made of anodised solid material. With the new cassette cover, even strong forces acting on the cover during battery removal, for example, are safely absorbed.

The complete, sophisticated system gets by with only 10 litres of hydraulic fluid, thanks to proven high-pressure technology. Those who have the environment in mind should not disregard this fact.

The **NxT Generation inground lift** is suitable for all installation variants and thus, of course, also for self-supporting installation. The **NxT Generation inground lifts** are also always a good choice for replacement campaigns or retrofitting in third-party cassettes.

NxT Generation: Patented, flexible, modular

