



MagiX 43-46 & 50-52

Electro-hydraulic scissor lift
with 4.3 or 5.0 t capacity

**VERTICAL
POWER**

NxT Generation - Surface-mounted lifts



The highlights of the MagiX 43-46 & 50-52:

- Low height
- No mechanical connections between the scissors*
- Electronic synchronisation monitoring
- Optimum lifting area
- Variable installation width

It's a kind of MagiX!

*only the version with play detector requires a mechanical connection

X-factor at the highest level.

MagiX 43-46 & 50-52:

The scissor lifts MagiX 43-46 & 50-52 come with a strong 4.3 t and 5.0 t lifting capacity and are available with platform lengths of 4.6 m and 5.2 m respectively, with a **low overall height**.

Installation can be done recessed or on-floor. The **platforms are sandblasted and powder-coated as standard for a long-lasting great appearance**. On request, the platforms can also be KTL coated.

The MagiX 43-46 & 50-52 offer optimum access to the vehicle as there are no mechanical connections between the scissor elements.

The **installation width is variable according to customer requirements**.

The pump-unit is located in the operating column. Of course, the MagiX 43-46 & 50-52 are equipped with a signal tone, digital height display and an emergency lowering valve.

The synchronisation is done electronically via a **proportional valve for vibration-free lifting and lowering**.

MagiX 43-46 & 50-52

Technical data

	MagiX 43-46	MagiX 50-52
Lifting capacity	4300 kg	5000 kg
Stroke length	1850 mm	1850 mm
Working height	2090 mm	2105 mm
Lifting / lowering time	~ 50 sec.	~ 50 sec.
Pump Unit	3 kW	3 kW
Voltage, max.	3x230/400 V - 50 Hz	3x230/400 V - 50 Hz
Compressed air	6-10 bar	6-10 bar

Scissor platform

Length	4650 mm	5200 mm
Width	630 mm	630 mm
Wheelbase, max.	4050 mm	4600 mm
Distance between platforms	800 - 1020 mm	800 - 1020 mm
Drive-on height	240 mm	255 mm
Depth of recess	255 mm	270 mm

Wheel-free device

Total length	1420 - 2100 mm	1420 - 2100 mm
Lifting capacity, up to	3500 kg	3500 kg
Height	500 mm	500 mm
Drive-over height	0 mm / recessed in platform	0 mm / recessed in platform
Operation	hydraulic	hydraulic
Lifting / lowering time	8/8 sec.	8/8 sec.

MagiX 43-46 & 50-52

Electro-hydraulic scissor lift with 4.3 or 5.0 t capacity

Standard colour:

- Platforms and scissors: RAL 7016
- Short drive-over ramps: galvanized
- Long drive-on ramps and floor ramps: painted

Options:

- Set of expansion bolts
- Rubber blocks
- KTL coating for platforms
- LED lightning set
- Installation frame for recessed installation
- Air hydraulic scissor jack
- Different ramps

Versions:

- Available with different voltages
- S = Flush platforms
- WL = With front recesses for turn tables and rear side slip plates
- C (Combi) = Platforms with integrated free-wheel lift
- P (Play detector) = Platform with play detector
- Incl. guiding edges for scissor jack for all models as standard
- Galvanized base frame as standard
- Play detector with 6 movement directions




MagiX 43-46 | 50-52

MagiX 43-46

AUTOP STENHOJ

Electro-hydraulic scissor lift with 4.3 t capacity

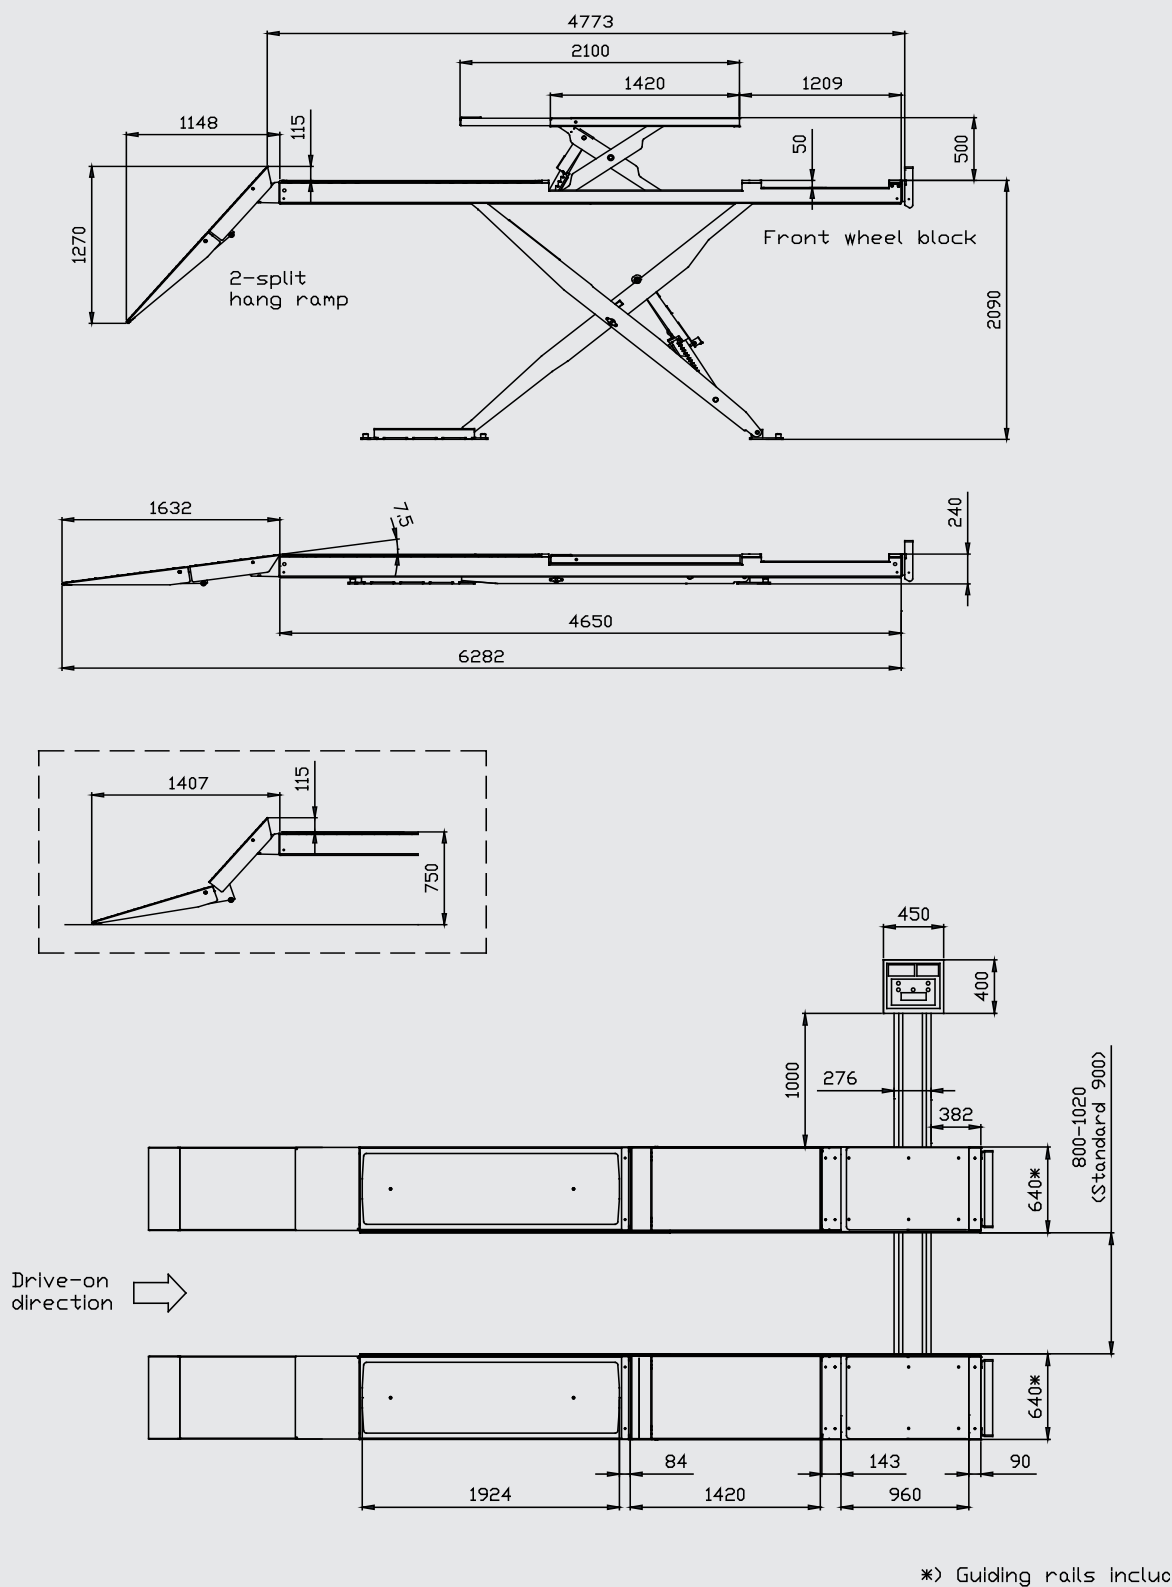


The MagiX 43-46 can also be installed recessed in the floor.
You can find more information and dimensional sketches at www.autopstenhoj.com.

Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 01/2025.

MagiX 50-52

AUTOP STENHOJ

Electro-hydraulic scissor lift with 5.0 t capacity

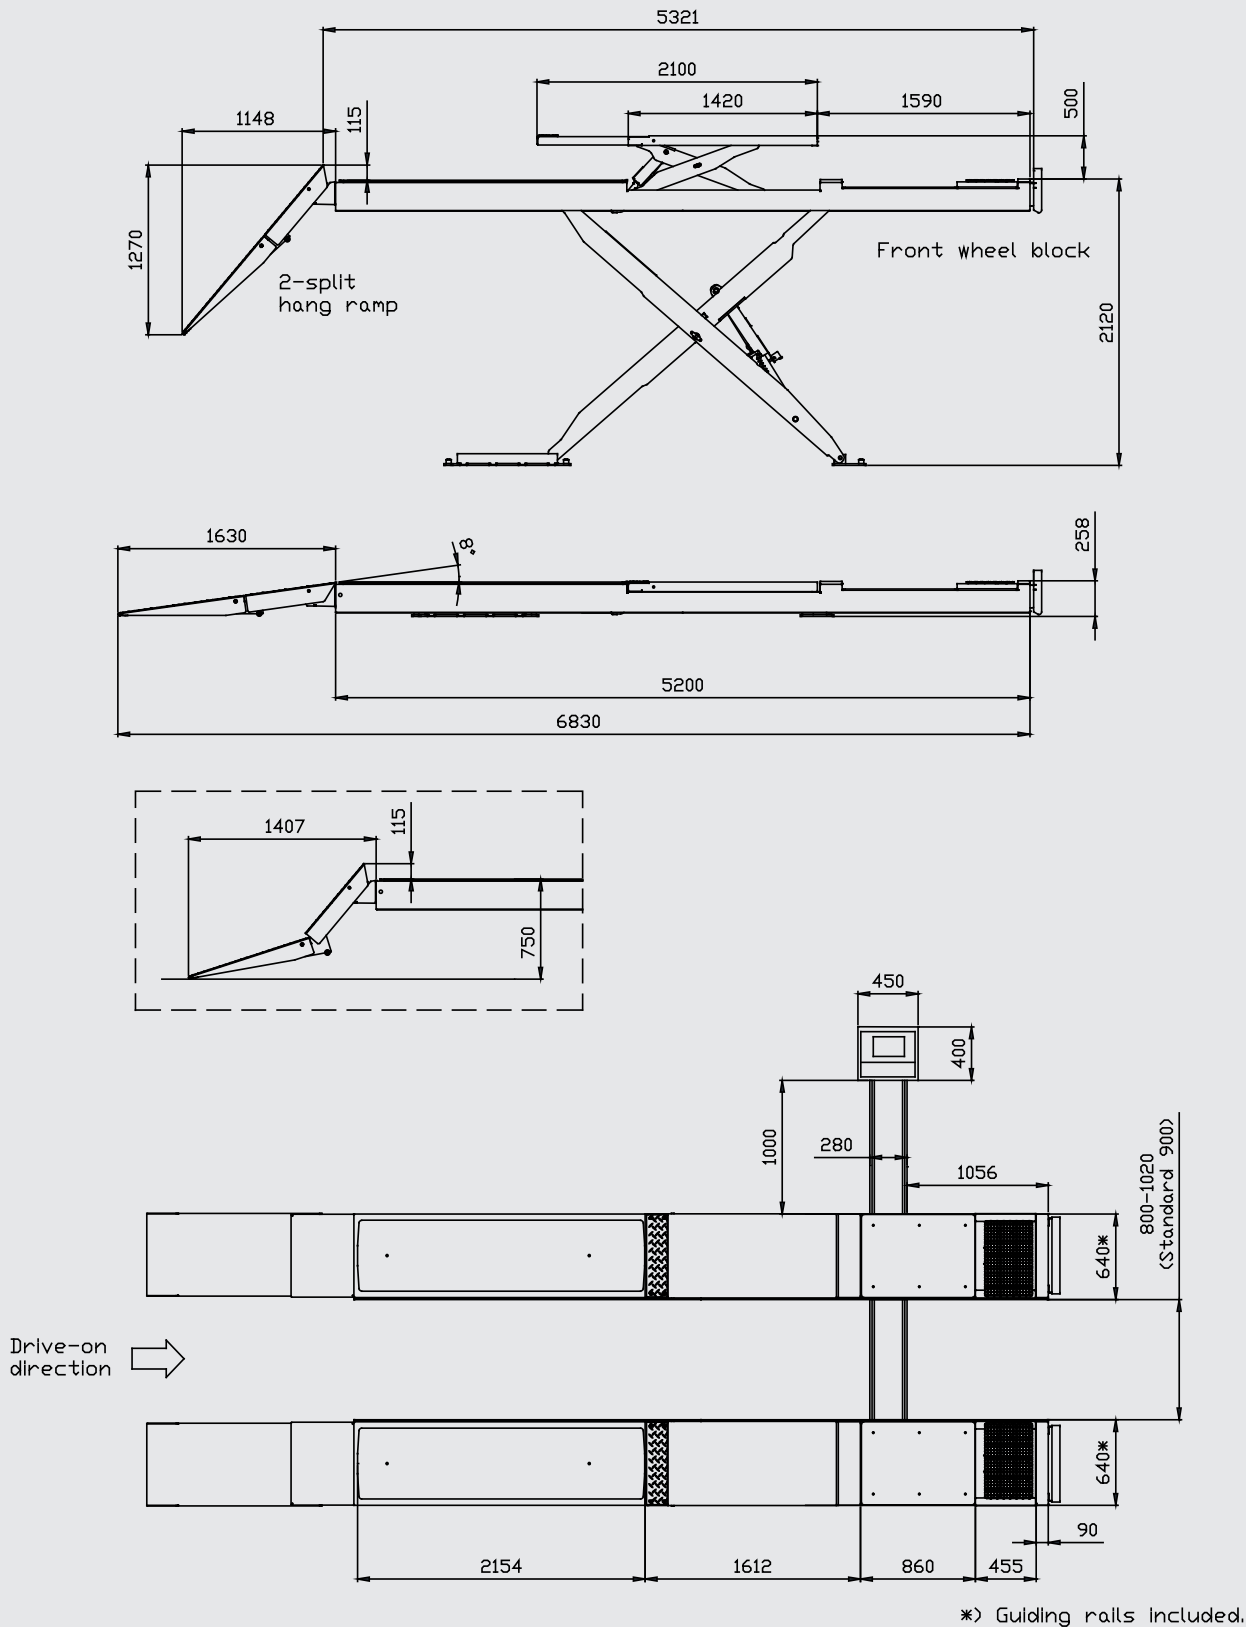

The MagiX 50-52 can also be installed recessed in the floor.
You can find more information and dimensional sketches at www.autopstenhoj.com.

Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 01/2025.

MagiX 43-46 & 50-52

AUTOP UPLIFTING COMPANY
STENHOJ



www.autopstenhoj.com

AUTOPSTENHOJ GmbH
Sandkampstr. 90 | 48432 Rheine
☎ +49 5971 8602-02
✉ info@autopstenhoj.com