

# Maestro 2.32

Electro-mechanical 2-post lift, 3.2 t capacity



#### Application

- Repair and maintenance

#### Approvals / recommendations

- Renault

## Description:

### Posts:

- Asymmetric post installation
- Very stable welded posts
- Without base frame
- Two motors
- Cold-rolled spindle
- Nylon nut sets
- Carriage with 6 guiding wheels and lubrication-free roller bearings
- Pushbutton control unit with alarm signal
- Programmable top stop
- Electronic synchronization

### Arms:

- Single telescopic front and rear arms, as standard
- Possibility of parallel parking of arms
- Internal arm locking system
- Low minimum height

### Standard colours:

- Arms: RAL 3020 – red
- Posts: RAL 7016 – grey

## Versions:

- Available with different voltages
- F = flex pad
- CF = combiflex pad
- CF-08 = combiflex 08 pad

## Optional extras:

- Available with 2 different portal heights; alternatively in-ground kit
- LED-lighting set
- Power pack
- Set of expansion bolts
- Extra control unit
- Long door stops
- Wheel holders
- Large program of extra pads

**Special colours available on request!**



Scan the QR-Code for detailed product information.

Further Information on [www.autopstenhoj.com](http://www.autopstenhoj.com)

**AUTOPSTENHOJ GmbH**


Sandkampstraße 90  
D-48432 Rheine  
☎ +49 5971 8602-02  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

**AUTOPSTENHOJ GmbH**

Barrit Langgade 188-190  
DK-7150 Barrit  
☎ +45 76 82 13 30  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

Technical data	
Lifting capacity	3,200 kg
Lifting height	1,900 mm
Working height	1,995 – 2,150 mm
Lifting / lowering time	approx. 40 sec.
Motor	2 x 1.5 kW
Voltage	3 x 230 / 400V – 50 Hz – 35 / 25 A

Arm superstructure	
Lifting pad included in the delivery	F: 777112 (95 - 125 mm) CF: 777504 (95 - 255 mm) CF-08: 777395 (95 - 250 mm)
Min. height	95 mm
Drive-through width	2,120 - 2,320 mm
Width between posts	2,380 - 2,580 mm
Total width - outer edges posts	2,960 - 3,160 mm
Total width - outer edges base plates	3,120 - 3,320 mm
Total height post	2,713 mm
Total height incl. portal	4,050 / 4,350 mm
Arm length front, min. - max.	F: 540 - 850 mm CF: 580 - 890 mm CF-08: 550 - 840 mm
Arm length rear, min. - max.	F: 900 - 1,425 mm CF: 935 - 1,425 mm CF-08: 920 - 1,415 mm

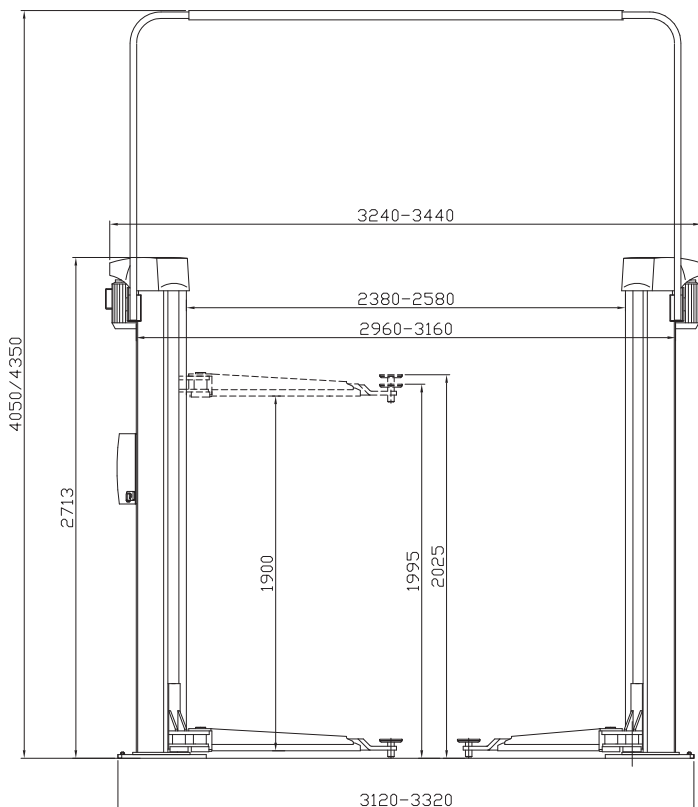

CF-pad / CF-08 pad / F-pad



Stable, welded post